

Bulkhead connector, through internal thread

- M5 G 1/8 G 1/4 G 3/8 G 1/2 G 3/4 G 1
- FPT-S-RSG



Working pressure min./max.

See table below

Ambient temperature min./max.

See table below

Technical data


Part No.	Port G	Delivery unit	Material
1823391225	M5	5 piece	Brass
1823391226	G 1/8	5 piece	Brass
1823391227	G 1/4	5 piece	Brass
1823391228	G 3/8	5 piece	Brass
1823391262	G 1/2	2 piece	Brass
8623003400	G 3/4	2 piece	Brass
R412026571	G 1	2 piece	Brass
R415009441	G 1	2 piece	Stainless steel

Technical information

Material	
Material	Brass, nickel-plated Stainless steel

Dimensions

Dimensions

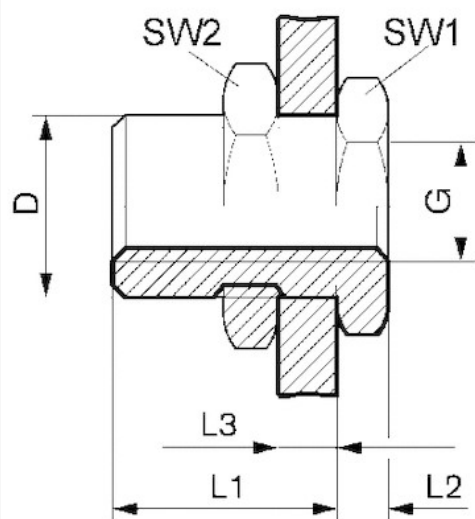

Dimensions

Part No.	Port G	D	L1	L2	L3 1)	SW1	SW2
1823391225	M5	M10x1	10.5	3.5	7	14	14
1823391226	G 1/8	M16x1,5	14	4	10	19	22
1823391227	G 1/4	M20x1,5	21	4	16	24	27
1823391228	G 3/8	M26x1,5	21	5	15	30	32
1823391262	G 1/2	M28x1,5	27	6	21	32	36
8623003400	G 3/4	M34x2	30	6	24	41	41
R412026571	G 1	M42x2	34	-	-	46	50
R415009441	G 1	M42x2	42	-	-	46	50

1) Max.