3/2-way valve, G1/8 port, bistable Mod. 438
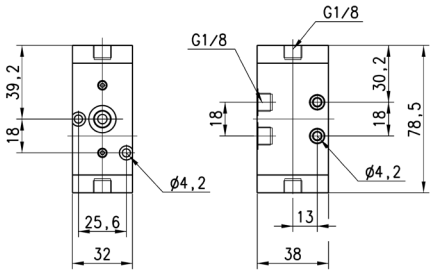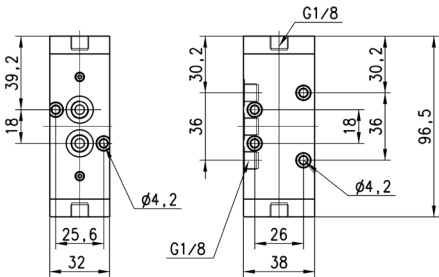

These valves can work NC or NO according to the last pilot signal.

Mod.	Mounting	Function	Flow rate Qn (Nl/min)	min. pilot Pressure (bar)	Working pressure (bar)	Symbol
438-33	in-line/on manifold	3/2	700	2	-0.9 ÷ 10	VP02
438-34	in-line/on manifold	3/2	700	2	-0.9 ÷ 10	VP03

5/2-way valve, G1/8 port, bistable Mod. 458

Mod.	Mounting	Function	Flow rate Qn (Nl/min)	min. pilot Pressure (bar)	Working pressure (bar)	Symbol
458-33	in-line/on manifold	5/2	700	2	-0.9 ÷ 10	VP06
458-34	in-line/on manifold	5/2	700	2	-0.9 ÷ 10	VP05

2.15.15