

DEWALT®

POWER TOOLS
ACCESSORIES

www.DEWALT.com

GUARANTEED TOUGH.®

EXTREME® SDS-plus® 4 CUTTER

MAXIMISED CENTRAL CORE
Enables more efficient energy transmission to the drill bit head.

4 FLUTE SPIRAL
with maximum flute entry
enables faster debris removal.

CARBIDE TIP
The solid two cutter head is flanked by two individual cutting tips delivering a fast and efficient drilling speed. These carbide tips and body are brazed together to create a strong and durable bond.

APPLICATIONS
For fixing holes and through holes 16mm - 30mm.

FOR USE WITH
SDS-plus® hammer drills, (corded and cordless).

Made in Germany.




SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty
DT9680-0Z	16	250	200	1
DT9681-0Z	16	450	400	1
DT9682-0Z	18	250	200	1
DT9683-0Z	18	450	400	1
DT9684-0Z	20	250	200	1
DT9685-0Z	20	450	400	1
DT9686-0Z	22	250	200	1
DT9687-0Z	22	450	400	1
DT9688-0Z	24	250	200	1
DT9689-0Z	24	450	400	1
DT9690-0Z	25	250	200	1
DT9691-0Z	25	450	400	1
DT9692-0Z	26	450	400	1
DT9693-0Z	28	250	200	1
DT9694-0Z	28	450	400	1
DT9695-0Z	30	250	200	1
DT9696-0Z	30	450	400	1

SET

Cat. No.	Description	Ø mm
DT9674-0Z	10 pack SDS-plus® Extreme® 2 Cutter drill bits plus thermal mug	6mm
DT9675-0Z	10 pack SDS-plus® Extreme® 2 Cutter drill bits plus thermal mug	7mm

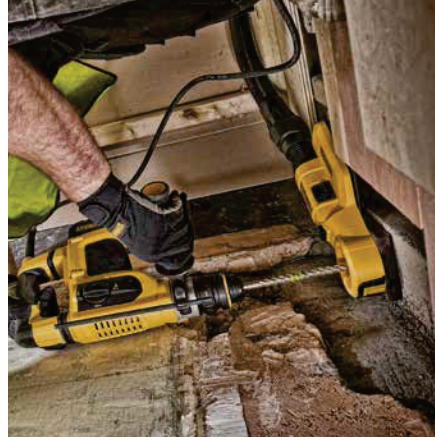

EXTREME® SDS-plus® 2 CUTTER

4 FLUTE HELIX
The 4 flute spiral incorporates a maximised central core for increased durability and energy transmission.

CORE REINFORCEMENT
Hardened steel body for extra strength and reduced breakage.

CARBIDE TIP
The solid two cutter head is flanked by two individual cutting tips delivering a fast and efficient drilling speed. These carbide tips and body are brazed together to create a strong and durable bond.

APPLICATIONS

Suitable for fast drilling of plug, anchor or clearance holes in masonry, stone, concrete and brick/block work.

FOR USE WITH

SDS-plus® flutem hammer drills (cordless and corded).

Made in Germany.



SINGLE PACKS

Cat. No.	Ø mm	Total length mm	Working length mm	Pack Qty
DT9625-0Z	3	135	75	1
DT9600-0Z	3.5	110	50	1
DT9602-0Z	4	110	50	1
DT9603-0Z	4	160	100	1
DT9604-0Z	5	110	50	1
DT9605-0Z	5	160	100	1
DT9606-0Z	5	210	150	1
DT9607-0Z	5	310	250	1
DT9620-0Z	5	460	400	1
DT9608-0Z	5.5	110	50	1
DT9609-0Z	5.5	160	100	1
DT9610-0Z	5.5	210	150	1
DT9611-0Z	5.5	260	200	1
DT9612-0Z	5.5	310	250	1
DT9613-0Z	5.5	460	400	1
DT9614-0Z	6	110	50	1
DT9615-0Z	6	160	100	1
DT9616-0Z	6	210	150	1
DT9617-0Z	6	260	200	1
DT9621-0Z	6	310	250	1
DT9618-0Z	6	460	400	1
DT9620-0Z	6.5	160	100	1
DT9621-0Z	6.5	210	150	1
DT9622-0Z	6.5	260	200	1
DT9623-0Z	6.5	310	250	1
DT9624-0Z	7	110	50	1
DT9625-0Z	7	160	100	1
DT9626-0Z	7	210	150	1
DT9627-0Z	7	260	200	1
DT9628-0Z	7	310	250	1
DT9629-0Z	8	110	50	1
DT9630-0Z	8	160	100	1
DT9631-0Z	8	210	150	1
DT9632-0Z	8	260	200	1
DT9633-0Z	8	310	250	1
DT9634-0Z	8	410	350	1
DT9635-0Z	8	460	400	1
DT9636-0Z	8	600	540	1
DT9637-0Z	9	160	100	1
DT9638-0Z	9	210	150	1
DT9639-0Z	10	110	50	1
DT9640-0Z	10	160	100	1
DT9641-0Z	10	210	150	1
DT9642-0Z	10	260	200	1
DT9643-0Z	10	310	250	1
DT9644-0Z	10	450	300	1
DT9645-0Z	10	600	550	1
DT9646-0Z	10	600	550	1
DT9647-0Z	10	1000	860	1
DT9648-0Z	11	160	100	1
DT9649-0Z	11	210	150	1
DT9652-0Z	12	160	100	1
DT9653-0Z	12	200	150	1
DT9654-0Z	12	260	200	1
DT9655-0Z	12	300	250	1
DT9656-0Z	12	350	300	1

