


Technical data

KR32LLH/3AS

Cam follower with shaft

Visual(s)

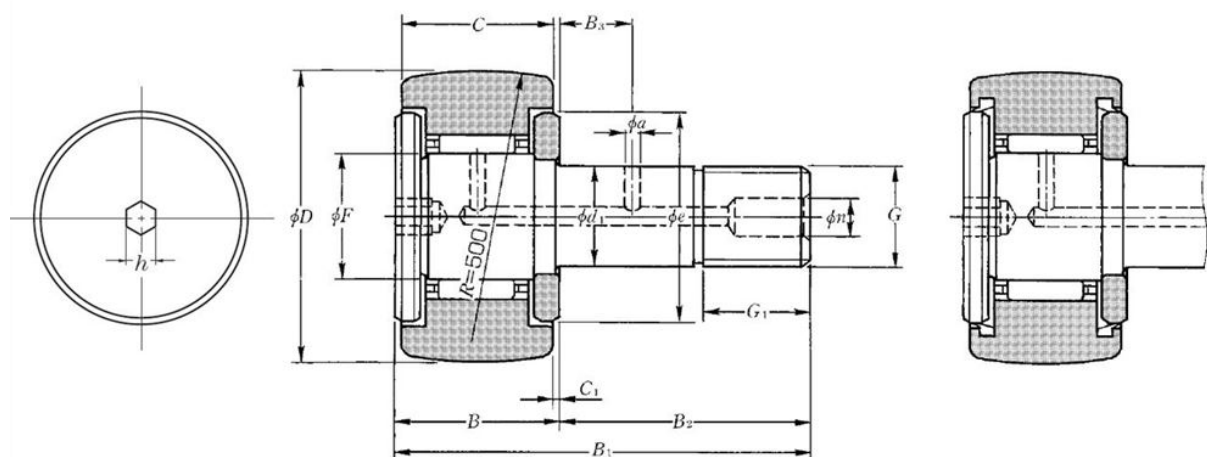

Product definition

D	32 mm
d1	12 mm
C	14 mm
F	15 mm
B	15 mm
B1	40 mm
B2	25 mm
G	M12X1.5
G1	13 mm
B3	6 mm
C1	0.6 mm
n	6 mm
a	3 mm
e	23 mm
h	6 mm
R	500 mm
Dw	2 mm
Lw	7.3 mm
Maximum tightening torque	20 Nm
Bearing with/without cage	Avec
Radial clearance class	CN
Precision class	P0
Mass	0.1 kg
Brand	NTN

Product performance

Cr	7.85 kN
C0r	9.65 kN
Track load capacity spherical outer ring	2.86 kN
Nlim (grease)	10,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	100 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.38 Hz
Characteristic outer ring frequency, BPF0	7.5 Hz
Characteristic inner ring frequency, BPFI	9.5 Hz