




Technical datasheet

N320G1C3

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, brass cage

Visual(s)

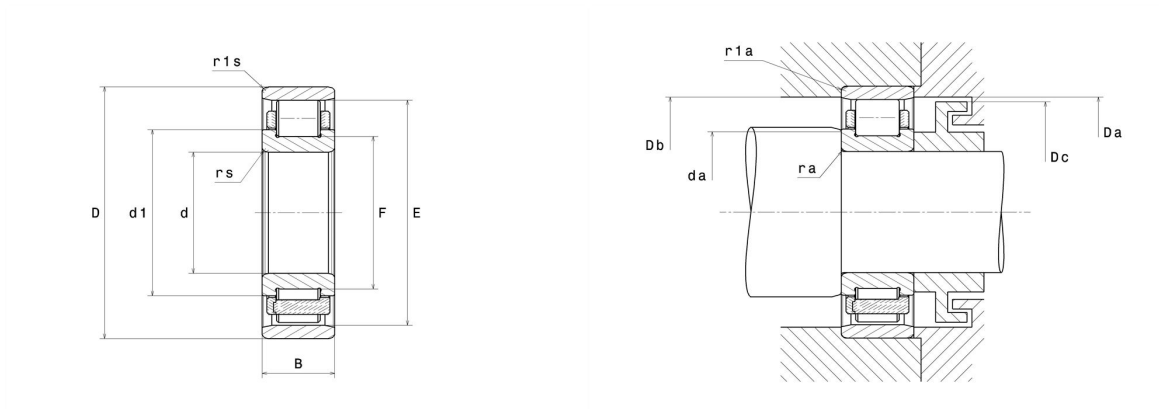

Product definition

d	100 mm
D	215 mm
B	47 mm
E	185.5 mm
F	129.5 mm
d1	140.5 mm
rs min	3 mm
r1s min	3 mm
Radial clearance class	C3
Mass (without HJ ring)	8.05 kg
Brand	NTN

Product performance

Dynamic load, C	299 kN
Static load, C0	335 kN
Fatigue limit load, Cu	35.6 kN
Nlim (oil)	3,800 rpm
Nlim (grease)	3,300 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.45 Hz
Characteristic outer ring frequency, BPF0	5.34 Hz
Characteristic inner ring frequency, BPFI	7.66 Hz

Abutment dimensions

da min	113 mm
Da max	202 mm
Db min	190 mm
Dc max	183 mm
ra max	2.5 mm
r1a max	2.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$