




## Technical data

### NU2208ET2XC3

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, polyamide cage

## Visual(s)

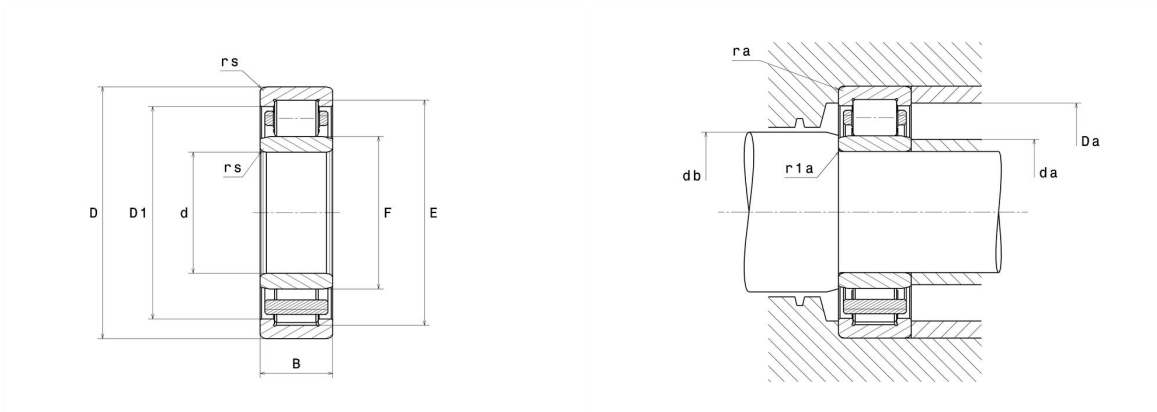

## Product definition

|                               |         |
|-------------------------------|---------|
| <b>d</b>                      | 40 mm   |
| <b>D</b>                      | 80 mm   |
| <b>B</b>                      | 23 mm   |
| <b>E</b>                      | 71.5 mm |
| <b>F</b>                      | 49.5 mm |
| <b>rs min</b>                 | 1.1 mm  |
| <b>r1s min</b>                | 1.1 mm  |
| <b>Radial clearance class</b> | C3      |
| <b>Mass (without HJ ring)</b> | 0.55 kg |
| <b>Brand</b>                  | NTN     |

## Product performance

|                                                      |              |
|------------------------------------------------------|--------------|
| <b>Dynamic load, C</b>                               | 72.5 kN      |
| <b>Static load, C0</b>                               | 77.5 kN      |
| <b>Fatigue limit load, Cu</b>                        | 9.5 kN       |
| <b>Nlim (oil)</b>                                    | 8,900 Tr/min |
| <b>Nlim (grease)</b>                                 | 7,600 Tr/min |
| <b>Min operating temperature, Tmin</b>               | -20 °C       |
| <b>Max operating temperature, Tmax</b>               | 120 °C       |
| <b>Characteristic cage frequency, FTF</b>            | 0.41 Hz      |
| <b>Characteristic rolling element frequency, BSF</b> | 5.32 Hz      |
| <b>Characteristic outer ring frequency, BPF0</b>     | 5.73 Hz      |
| <b>Characteristic inner ring frequency, BPF1</b>     | 8.27 Hz      |

## Abutment dimensions

|                |         |
|----------------|---------|
| <b>da min</b>  | 46.5 mm |
| <b>da max</b>  | 49 mm   |
| <b>db min</b>  | 52 mm   |
| <b>Da max</b>  | 73.5 mm |
| <b>ra max</b>  | 1 mm    |
| <b>r1a max</b> | 1 mm    |

## Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$