

High Precision, Digital Pressure Switch Series ZSE40/ISE40


How to Order

Set pressure range

Nil	-0.100 to 1.000 MPa	For positive pressure
-----	---------------------	-----------------------


For positive pressure

ISE40



For vacuum/compound pressure

ZSE40



Set pressure range

Nil	10.0 to -101.3 kPa	For vacuum pressure
F	-100.0 to 100.0 kPa	For compound pressure

Piping specifications

01: R 1/8 (With M5 female threads) T1: NPT 1/8 (With M5 female threads)	W1: Rc 1/8 Reverse pressure two directions
* C4: With ø4 One-touch fitting * C6: With ø6 One-touch fitting Wall mount	* M5: M5 x 0.8 (Female threads) Wall mount

* Option

Input/Output specifications

22	NPN open collector 2 outputs + analog output
30 *	NPN open collector 2 outputs + auto shift input
62 *	PNP open collector 2 outputs + analog output
70 *	PNP open collector 2 outputs + auto shift input

* Option

Note

When equipped with auto shift function, the following ranges can be set.

Set pressure range	Setting range
-100.0 to 100.0 kPa	-100.0 to 100.0 kPa
10.0 to -101.3 kPa	-101.3 to 101.3 kPa
-0.1 to 1.000 MPa	-1.000 to 1.000 MPa

Option

Nil	None
A	Bracket A (ZS-24-A)
B	Bracket B (ZS-24-B)
E	Panel mount (ZS-22-A)
F	Panel mount (ZS-24-C) + Front protective cover

* When optional parts only are required, order with the part numbers inside ().

Unit specifications

Nil	With unit switching function ^{Note1)}
M	SI unit only ^{Note 2)}

Note 1) This will no longer be sold for use in Japan after the new Weight and Measure Act is implemented (October,1999).

Note 2) Fixed unit
For vacuum/compound pressure: kPa
For positive pressure: MPa

Lead wire length

Nil	0.6 m
L	3 m

ZSE□
ISE□

PSE

ZSE3

PS

ZSE₁
SE₂

ZSP

ISA2

IS□

ZSM

PF2□

IF□

Data

Series ZSE40/ISE40

Specifications

		ZSE40F (Compound pressure)	ZSE40 (Vacuum pressure)	ISE40 (Positive pressure)
Rated pressure range		−100.0 to 100.0 kPa	0.0 to −101.3 kPa	0.000 to 1.000 MPa
Operating pressure range/Set pressure range		−100.0 to 100.0 kPa	10.0 to −101.3 kPa	−0.100 to 1.000 MPa
Withstand pressure		500 kPa		1.5 MPa
Set pressure resolution Note 1)	kPa	0.1		—
	MPa	—		0.001
	kgf/cm ²	0.001		0.01
	bar	0.001		0.01
	psi	0.02	0.01	0.1
	mmHg	1		—
	InHg	0.1		—
Applicable fluid		Air, Non-corrosive/Non-flammable gas		
Power supply voltage		12 to 24 VDC ±10%, Ripple (p-p) 10% or less		
Current consumption		55 mA or less		
Switch output		NPN or PNP 2 outputs	Max. load current : 80 mA Max. applied voltage: 30 VDC (With NPN output) Residual voltage : 1 V or less (With 80 mA load current)	
Repeatability		±0.2% F.S. ±1digit or less		
Hysteresis	Hysteresis mode	Variable		
	Window comparator mode	Fixed (3 digits) Note4)		
Response time (With anti-chattering function)		2.5 ms or less (With anti-chattering function: 24 ms, 192 ms and 768 ms selections)		
Output short circuit protection		Yes		
Display		3 1/2 digit LED display (Sampling cycle: 5 times/sec.)		
Display accuracy		±2% F.S. ±1 digit or less (at ambient temperature of 25 ±3°C)		
Indicator light		Green LED (OUT1: Lights when ON), Red LED (OUT2: Lights when ON)		
Analog output Note 2)		Output voltage: 1 to 5 V ±5% F.S. or less (in rated pressure range) Linearity: ±1% F.S. or less Output impedance: Approx. 1 kΩ	Output voltage: 1 to 5 V ±2.5% F.S. or less (in rated pressure range) Linearity: ±1% F.S. or less Output impedance: Approx. 1 kΩ	
Auto shift input Note 3)		No-voltage input (Reed or solid state), input 5 ms or more		
Environmental resistance	Enclosure	IP65		
	Ambient temperature range	Operating: 0 to 50°C, Stored: −10 to 60°C (No condensation or freezing)		
	Ambient humidity range	Operating/Stored: 35 to 85% RH (No condensation)		
	Withstand voltage	1000 VAC for 1 min. between lead wires and body		
	Insulation resistance	50 MΩ or more (at 500 VDC) between lead wires and body		
	Vibration resistance	10 to 500 Hz at the smaller of amplitude 1.5 mm or acceleration 98 m/s ² (10 G) in X, Y, Z directions for 2 hrs. each (De-energized)		
	Impact resistance	980 m/s ² (100 G) in X, Y, Z directions 3 times each (De-energized)		
Temperature characteristics		In a temperature range of 0 to 50°C, ±2% F.S. or less of pressure measured at 25°C		
Port size		O1: R 1/8, M5 x 0.8, T1: NPT1/8, M5 x 0.8, W1: Rc 1/8 C4: With ø4 One-touch fitting, C6: With ø6 One-touch fitting, M5: M5 female threads		
Lead wire		5-wire oil resistant heavy-duty cord (0.15 mm ²)		
Weight		O1/T1 types approx. 60 g, W1 type approx. 80 g, C4/C6/M5 types approx. 92 g (Each including 0.6 m lead wires)		

Note 1) Equipped with unit switching function

(Types without the unit switching function use SI units (kPa or MPa) only.)

Note 2) For ZSE40 (F)/ISE40-□-22(L)-(M)

Note 3) For ZSE40 (F)/ISE40-□-30(L)-(M)

Note 4) For ZSE40F (compound pressure) with "psi" indication, this is 0.03 to 0.04 psi.

Note 5) For ZSE40F (compound pressure) with "psi" indication, zero clear is in the range of ±0.01 psi.


Note)

When equipped with auto shift function, the following ranges can be set.


Set pressure range	Setting range
−100.0 to 100.0 kPa	−100.0 to 100.0 kPa
10.0 to −101.3 kPa	−101.3 to 101.3 kPa
−0.1 to 1.000 MPa	−1.000 to 1.000 MPa

Example of Internal Circuit and Wiring


**ZSE40(F)
ISE40-□-22(L)-(M)
With analog output**

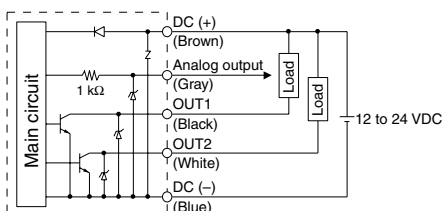

**ZSE40(F)
ISE40-□-62(L)-(M)
With analog output**

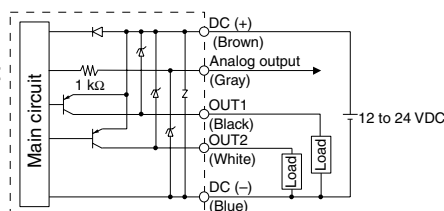

**ZSE40(F)
ISE40-□-30(L)-(M)
With auto shift input**

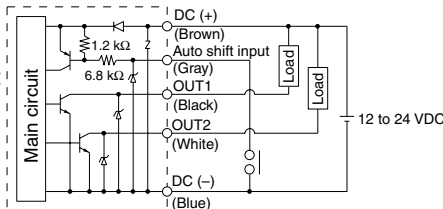

**ZSE40(F)
ISE40-□-70(L)-(M)
With auto shift input**

