

Push-in Fittings, Metric, Series QR2-S

Right Angle Banjo Connection, External Thread, QR2-S-RW1



Ambient Temperature min./max.
Working pressure min./max

-20°C / +80°C
-0.95 bar / 16 bar


Materials:
Housing
Seal
Tooth lock washer
Release ring
Thread

Brass, nickel-plated
Acrylonitrile butadiene rubber
Stainless steel
Brass, nickel-plated
Brass, nickel-plated

Technical Remarks

- The series QR1 (plastic) and QR2 (metal) can not be combined
- Thread seal with captive O-ring
- For further information about assembling and tolerances of compatible tubing, see the online section "Technical information".

Dimensions

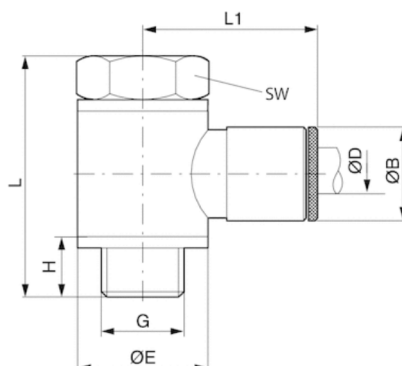

Part No.	Port G	Port D	L	L1	H	Ø B	Ø E	SW	Delivery quantity [Piece]	Weight [kg]
1823391549	M5	Ø 4	17.5	18.5	4.5	9	7	8	10	0.01
1823391550	M5	Ø 5	17.5	19.5	4.5	10	7	8	10	0.016
1823391905	M5	Ø 6	19	19	4.5	10.5	10	8	10	0.018
1823391551	G 1/8	Ø 4	28	21	7.5	9	14	14	10	0.024
1823391552	G 1/8	Ø 5	28	22.5	7.5	10	14	14	10	0.026
1823391553	G 1/8	Ø 6	28	22.5	7.5	11	14	14	10	0.027
1823391554	G 1/8	Ø 8	28	24.5	7.5	13	14	14	10	0.032
1823391556	G 1/4	Ø 6	33	24	9	11	18	17	10	0.035
1823391557	G 1/4	Ø 8	33	26	9	13	18	17	10	0.048
1823391558	G 1/4	Ø 10	33	27	9	15	18	17	5	0.052
1823391559	G 3/8	Ø 8	36	28	9	13	21	19	5	0.072
1823391560	G 3/8	Ø 10	36	29	9	15	21	19	5	0.077
1823391561	G 3/8	Ø 12	36	30	9	17	21	19	5	0.088