



Technical data

UCFC.206


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC206G2, FC206

VISUAL (S)

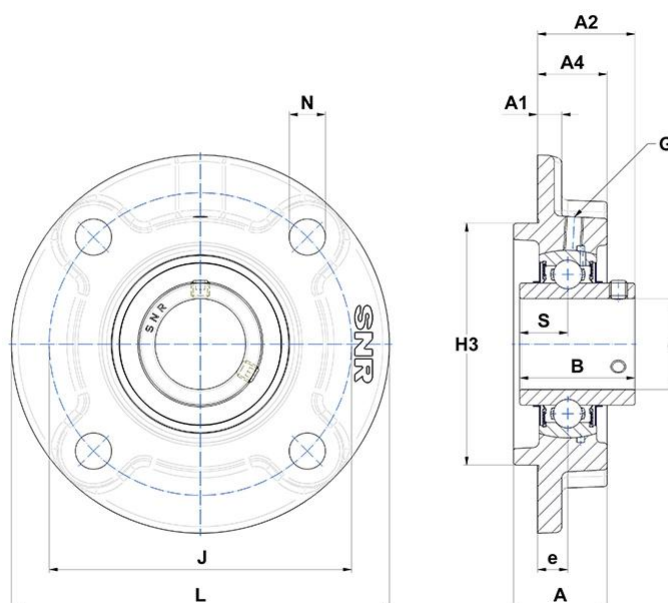

PRODUCT DIMENSIONS

A - Housing height	31 mm
A1 - Housing foot height / flange height	8 mm
A2 - Total height from mouting surface	32,2 mm
A4 - Housing height from mounting surface	23 mm
B - Width of Inner Ring	38,1 mm
d - Shaft diameter	30 mm

PRODUCT DIMENSIONS

e - Distance mounting surface to bearing center	10 mm
G - Grease fitting	M6x1
H3 - Centering dia	80 mm
J - Mounting holes distance	100 mm
L - Housing width / diameter	125 mm
N - Mounting hole dimension	12 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	15,9 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	19,5 kN
C0 - Static load rating	11,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,28 kg
Recommended tightening torque for set screw	5.5 N-m