


TNMG

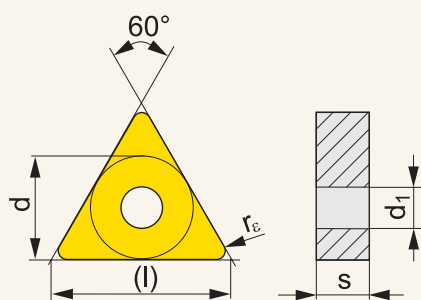

Dimensions	(l)	d	d ₁	s		
1604	16,5	9,525	3,81	4,76		
2204	22,0	12,700	5,16	4,76		
2706	27,5	15,875	6,35	6,35		
3309	33,0	19,050	7,94	9,52		

Chipbreaker	ISO	/ Grade												Radius		Feed/rev.		Depth of cut			
		T5305	T5315	T7335	T9310	T9315	T9325	T9335	6630	T8315	T8330	HF7	TT310				r _c	f _{min}	f _{max}	a _{p min}	a _{p max}
	TNMG 160404E-FF								●								0,4	0,06	0,20	0,4	1,5
	TNMG 160408E-FF								●								0,8	0,08	0,25	0,8	1,5
	TNMG 160404E-FM			●	●	●	●		●	●		●					0,4	0,10	0,24	0,5	3,0
	TNMG 160408E-FM			●	●	●	●		●	●		●					0,8	0,15	0,45	0,8	3,0
	TNMG 160412E-FM					●	●			●							1,2	0,15	0,45	1,2	3,0
	TNMG 160408E-KR	●	●														0,8	0,20	0,40	0,8	4,0
	TNMG 160404E-M		●			●	●	●									0,4	0,17	0,24	0,8	3,0
	TNMG 160408E-M	●	●		●	●	●	●	●								0,8	0,15	0,48	0,8	5,0
	TNMG 160412E-M		●			●	●	●									1,2	0,17	0,72	1,2	5,3
	TNMG 220408E-M	●	●		●	●	●	●	●								0,8	0,17	0,48	1,0	6,0
	TNMG 220412E-M	●	●			●	●	●	●								1,2	0,17	0,72	1,2	6,0
	TNMG 160404E-NF			●		●	●		●	●	●						0,4	0,13	0,24	0,4	3,0
	TNMG 160408E-NF			●		●	●		●	●	●						0,8	0,15	0,30	0,8	3,0
	TNMG 160404E-NM			●		●			●								0,4	0,15	0,24	0,5	3,0
	TNMG 160408E-NM			●		●			●								0,8	0,20	0,40	1,0	3,0
	TNMG 220408E-NM			●		●			●								0,8	0,20	0,40	1,0	3,5
	TNMG 220412E-NM			●		●											1,2	0,20	0,40	1,2	3,5
	TNMG 160408E-R					●	●	●									0,8	0,25	0,48	2,0	5,0
	TNMG 160412E-R						●	●									1,2	0,25	0,70	2,0	5,0
	TNMG 220408E-R						●										0,8	0,25	0,48	2,0	6,0
	TNMG 220412E-R						●										1,2	0,25	0,70	2,0	6,0
	TNMG 220416E-R						●										1,6	0,25	0,80	2,0	6,0
	TNMG 160408E-RM	●	●		●	●	●	●									0,8	0,20	0,48	1,0	5,3
	TNMG 160412E-RM	●	●			●	●	●		●							1,2	0,25	0,65	1,5	5,3
	TNMG 220408E-RM	●	●		●	●	●	●									0,8	0,20	0,48	1,0	7,0
	TNMG 220412E-RM	●	●		●	●	●	●									1,2	0,25	0,65	1,5	7,0