

Serie QR2-S-RVT Standard

- Winkelverschraubung, drehbar
- Außengewinde
- G 1/8 G 1/4
- Steckanschluss
- Ø 4 Ø 6 Ø 8 Ø 10 Ø 12
- QR2-S-RVT



Betriebsdruck min./max.

-0,95 ... 16 bar

Umgebungstemperatur min./max.

-20 ... 80 °C

Gewicht pro Stück

Siehe Tabelle unten

Technische Daten

Materialnummer	Anschluss G	Anschluss D	Liefereinheit	Gewicht pro Stück
1823391710	G 1/8	Ø 4	10 Stück	0,018 kg
1823391711	G 1/8	Ø 6	10 Stück	0,02 kg
1823391712	G 1/8	Ø 8	10 Stück	0,022 kg
R412007687	G 1/8	Ø 10	5 Stück	0,032 kg
1823391713	G 1/4	Ø 4	10 Stück	0,024 kg
1823391714	G 1/4	Ø 6	10 Stück	0,025 kg
1823391715	G 1/4	Ø 8	10 Stück	0,027 kg
1823391718	G 1/4	Ø 10	5 Stück	0,031 kg
1823391843	G 1/4	Ø 12	5 Stück	0,042 kg

Technische Informationen

Die Serien QR1 (Kunststoff) und QR2 (Metall) sind nicht kombinierbar
Gewindeabdichtung durch gekammerten O-Ring


Weitere Informationen zu Montage und Toleranzen der verwendbaren Schläuche finden Sie im Dokument „Technische Informationen“ (erhältlich im MediaCentre).

Technische Informationen

Werkstoff	
Gehäuse	Messing, vernickelt
Dichtung	Acrylnitril-Butadien-Kautschuk

Werkstoff		
Zahnscheibe		Nichtrostender Stahl
Lösering	Lösering	Messing, vernickelt
Gewinde		Messing, vernickelt

Abmessungen

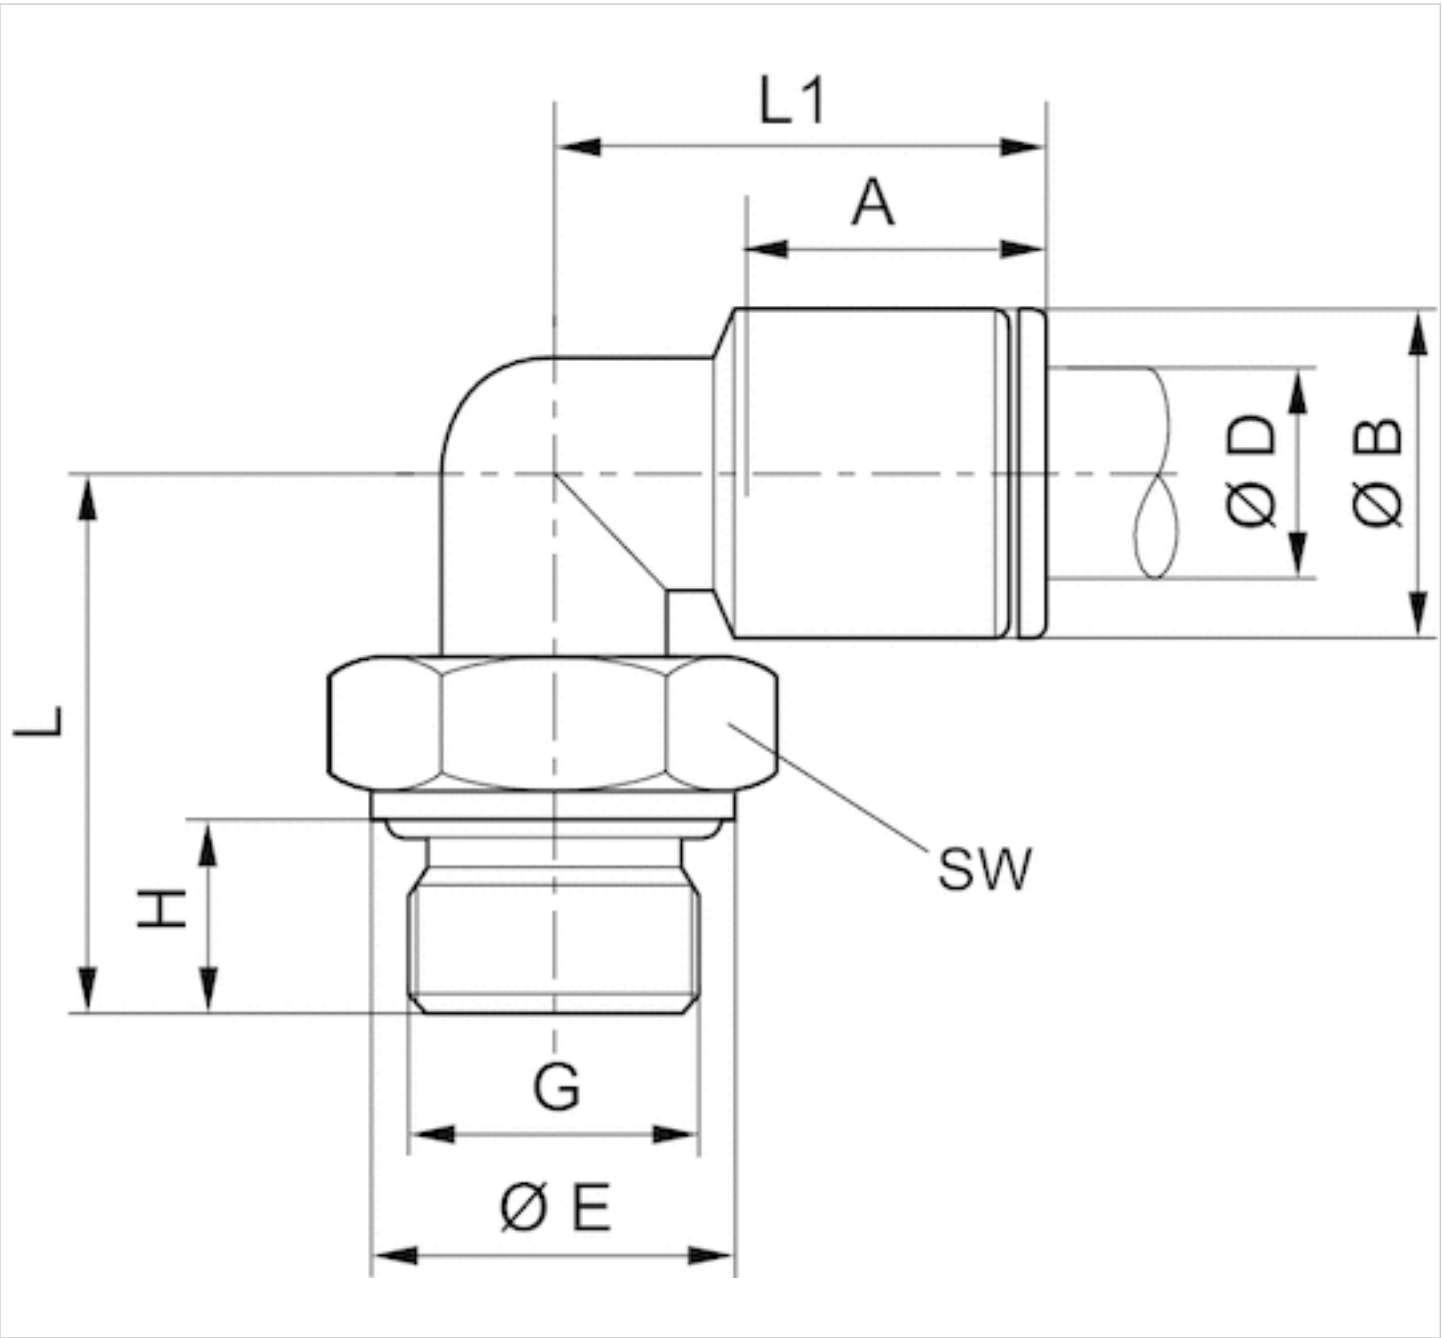

Abmessungen

Materialnummer	Anschluss D	Anschluss G	ØB	ØE	H	L	L1	A Einstecktiefe	SW
1823391710	Ø 4	G 1/8	9	13	6	20	19	15	13

Materialnummer	Anschluss D	Anschluss G	ØB	ØE	H	L	L1	A Einstecktiefe	SW
1823391711	Ø 6	G 1/8	11	13	6	20	21	16	13
1823391712	Ø 8	G 1/8	13	13	6	20	24	18	13
R412007687	Ø 10	G 1/8	15	13	6	24	27	19	13
1823391713	Ø 4	G 1/4	9	16	8	24	19	15	13
1823391714	Ø 6	G 1/4	11	16	8	24	21	16	13
1823391715	Ø 8	G 1/4	13	16	8	24	24	18	13
1823391718	Ø 10	G 1/4	15	16	8	24	27	19	16
1823391843	Ø 12	G 1/4	17	16	8	30.5	29	20	16

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™