




Technical datasheet

N1016G1C4

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, brass cage

Visual(s)

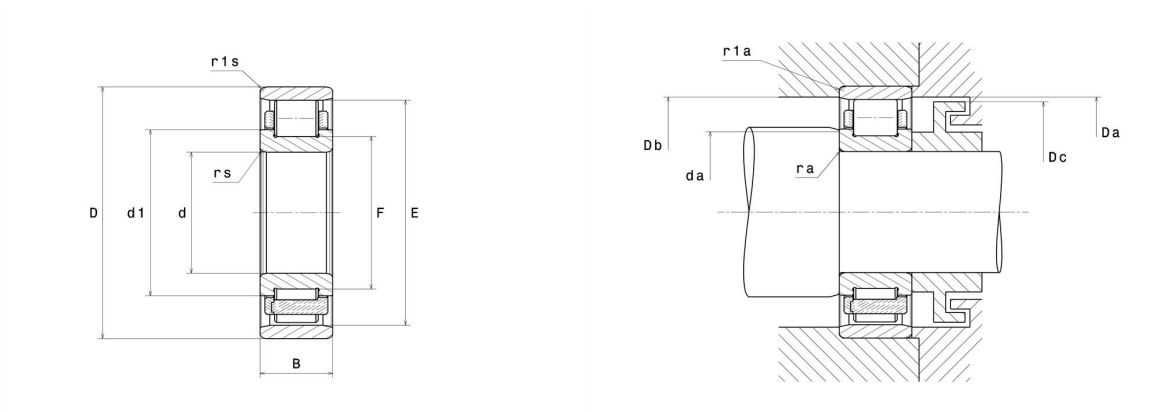

Product definition

d	80 mm
D	125 mm
B	22 mm
E	113.5 mm
F	91.5 mm
d1	95.9 mm
rs min	1.1 mm
r1s min	1 mm
Radial clearance class	C4
Mass (without HJ ring)	0.91 kg
Brand	NTN

Product performance

Dynamic load, C	72.5 kN
Static load, C0	90.5 kN
Fatigue limit load, Cu	11 kN
Nlim (oil)	6,700 rpm
Nlim (grease)	5,700 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	86.5 mm
Da max	120 mm
Db min	115 mm
Dc max	111 mm
ra max	1 mm
r1a max	1 mm

Calculation factors

Equivalent dynamic radial load

$$P = F_r$$

Equivalent static radial load

$$P_0 = F_r$$