


FK SC/LI

Felt wheels and lenses are mainly used peripherally.

Felt wheels with metal inserts (MS) are used for increased stock removal when pre-polishing with diamond grinding pastes.

Matching tool drives:
flexible shaft drive, straight grinder

Ordering notes:
■ Please order the matching arbor separately.
■ Please complete the description with the desired type.

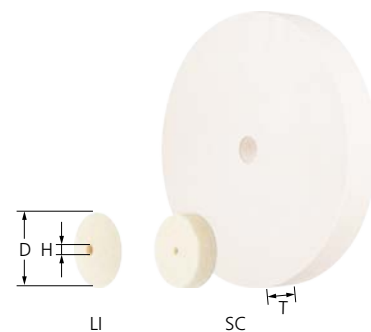

D [mm]	T [mm]	H [mm]	Type			Opt. RPM	Max. RPM		Suitable arbors		Description
			M (medium)	H (hard)	MS (metal insert)						
			EAN 4007220								

Lenses

17	5	2	-	036402	-	5,600–11,000	28,000	BO 2,3/1,6 1-5, BO 3/1,6 1-5	10	FK LI 1705/2 ...
22	5	2	-	036419	-	4,300–8,650	21,700	BO 2,3/1,6 1-5, BO 3/1,6 1-5	10	FK LI 2205/2 ...

Wheels

17	5	2	036372	-	-	5,600–11,000	28,000	BO 2,3/1,6 1-5, BO 3/1,6 1-5	10	FK SC 1705/2 ...
20	5	2	036389	-	-	5,000–10,000	23,500	BO 2,3/1,6 1-5, BO 3/1,6 1-5	10	FK SC 2005/2 ...
30	5	2	036396	-	-	3,000–6,000	20,000	BO 2,3/1,6 1-5, BO 3/1,6 1-5	10	FK SC 3005/2 ...
	7	6	153864	-	-	3,000–6,000	20,000	BO 6/6 3-10	5	FK SC 3007/6 ...
45	9	6	153840	-	-	2,000–4,000	13,500	BO 6/6 3-10	5	FK SC 4509/6 ...
60	10	6	297605	-	-	1,500–3,000	10,000	BO 6/6 3-10	5	FK SC 6010/6 ...
80	10	10	154069	-	295342	1,000–2,000	7,500	BO 8/10 6-20	5	FK SC 8010/10 ...
100	20	10	297612	-	295359	900–1,800	6,100	BO 8/10 6-20	1	FK SC 10020/10 ...
125	20	20	297629	-	295366	750–1,500	4,900	BO 12/20 10-50, BO MK 1/20 10-50	1	FK SC 12520/20 ...
150	25	20	297636	-	-	600–1,200	4,000	BO 12/20 10-50, BO MK 1/20 10-50	1	FK SC 15025/20 ...
200	30	20	297643	-	-	500–1,000	3,000	BO 12/20 10-50, BO MK 1/20 10-50	1	FK SC 20030/20 ...

Felt flap discs FFS

FFS

Felt flap discs are used for pre-polishing and high-gloss polishing on medium-sized to large components.

Advantages:
■ Low thermal load on the workpiece.

Matching tool drives:
angle grinder, cordless angle grinder

Recommendations for use:
■ Use the hard type for pre-polishing flat surfaces, and the soft type for high-gloss polishing and processing workpieces with lots of contours.
■ If very fine finishes need to be achieved, the two types can be used successively.

Ordering notes:
■ Please complete the description with the desired type.



D [mm]	T [mm]	H [mm]	Type		Opt. RPM	Max. RPM		Description
			W (soft)	H (hard)				
			EAN 4007220					
115	22	22.23	936085	936139	1,650	8,350	5	FFS 115/22,23 ...
125	22	22.23	936146	936153	1,500	7,650	5	FFS 125/22,23 ...