


The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 1775, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

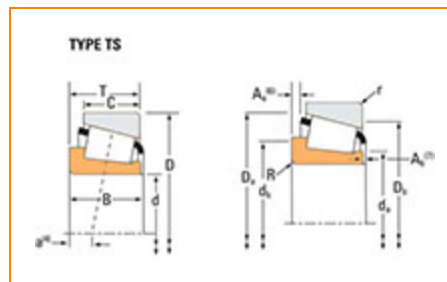

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	1700
Cone Part Number	1775
Design Units	Imperial
Cage Type	Stamped Steel
C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)¹	17800 lbf 79100 N
C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)²	4610 lbf 20500 N



Dimensions

d - Cone Bore	3/4 in 19.05 mm
B - Cone Width	0.7810 in 19.837 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius³	0.060 in 1.5 mm
da - Cone Frontface Backing Diameter	0.98 in 25 mm
db - Cone Backface Backing Diameter	1.06 in 27 mm
Ab - Cage-Cone Frontface Clearance	0.08 in 2 mm
Aa - Cage-Cone Backface Clearance	0.01 in 0.3 mm
a - Effective Center Location⁴	-0.27 in -6.9 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁵	2650 lbf 11800 N
C1 - Dynamic Radial Rating (1 million revolutions)⁶	10200 lbf 45400 N
C0 - Static Radial Rating	10200 lbf 45300 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷	1390 lbf 6200 N

Factors

K - Factor⁸	1.9
G1 - Heat Generation Factor (Roller-Raceway)	10.6
G2 - Heat Generation Factor (Rib-Roller End)	5.39
Cg - Geometry Factor⁹	0.0521

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a_3 .

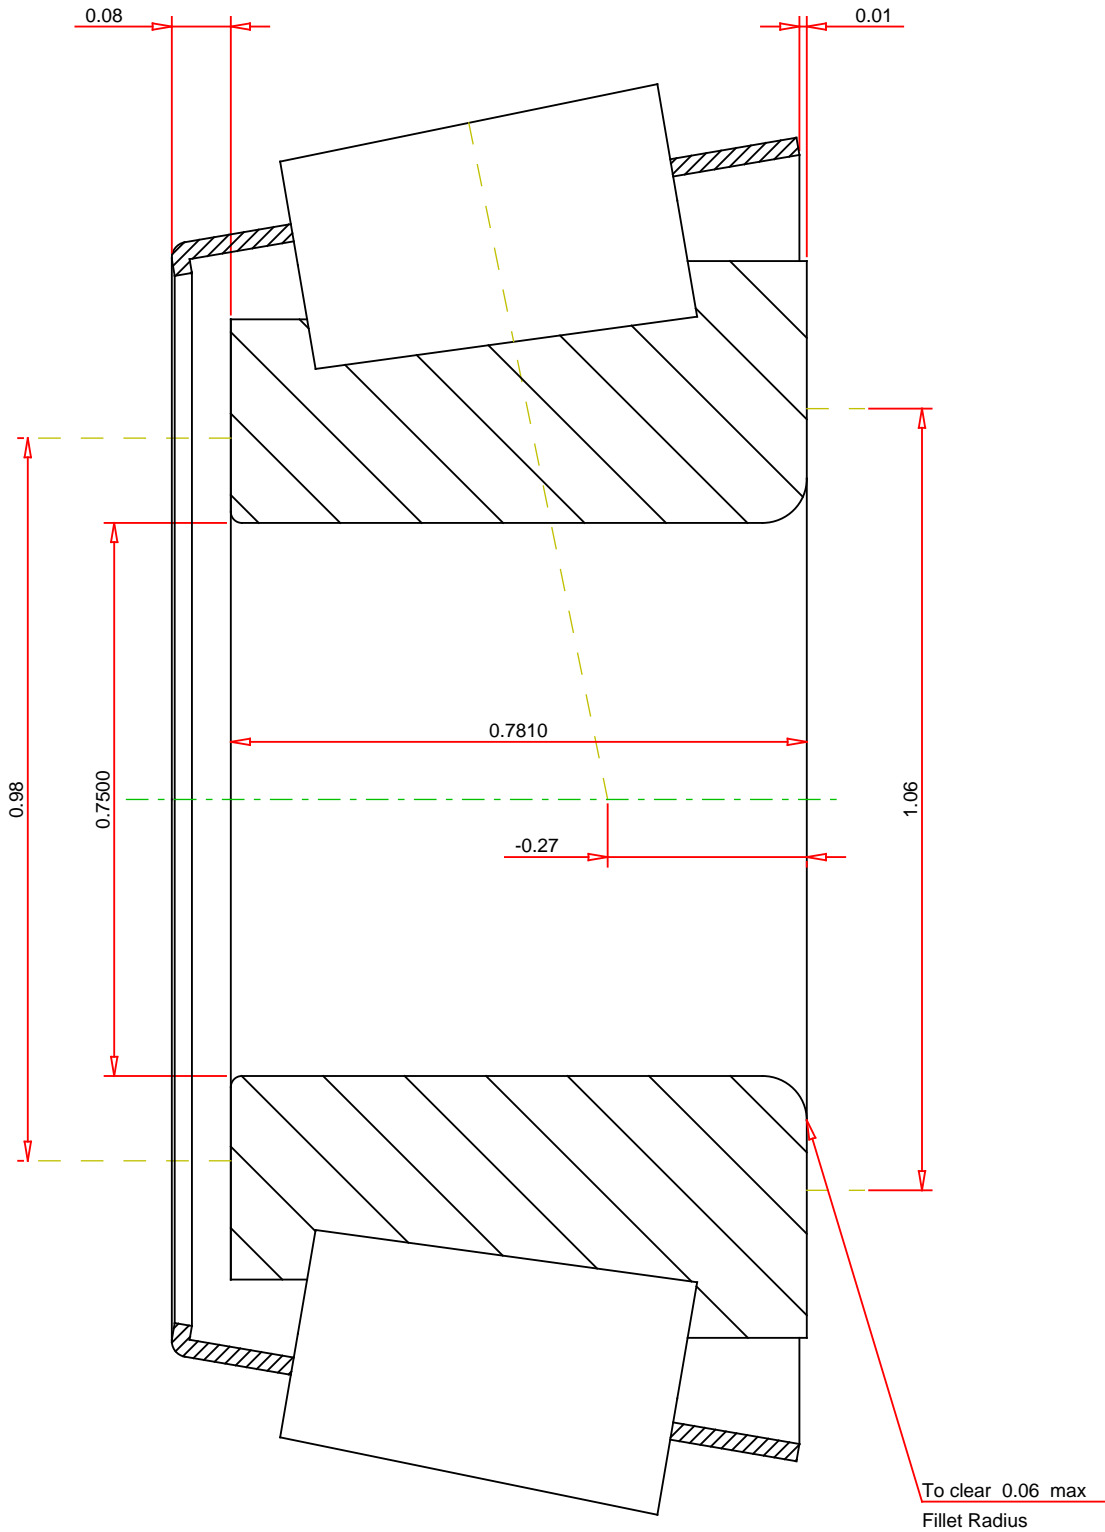

IMPERIAL UNITS

Number of Rollers Per Row 13

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

1775
Tapered Roller Bearings - Single Cones - Imperial

K Factor	1.9
Dynamic Radial Rating - C90	2650 lbf
Dynamic Thrust Rating - Ca90	1390 lbf
Dynamic Radial Rating - C1	10200 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY