




## Technical data

### 32026XU

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

## Visual(s)

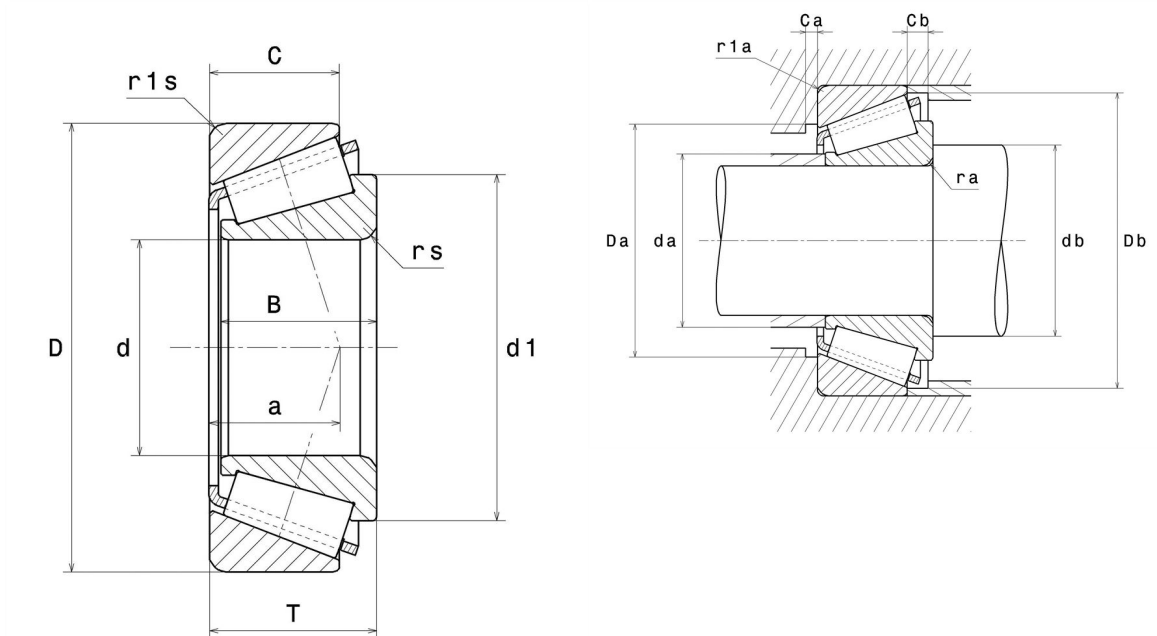

## Product definition

|                          |         |
|--------------------------|---------|
| <b>d</b>                 | 130 mm  |
| <b>D</b>                 | 200 mm  |
| <b>B</b>                 | 45 mm   |
| <b>C</b>                 | 34 mm   |
| <b>T</b>                 | 45 mm   |
| <b>a</b>                 | 43.5 mm |
| <b>rs min</b>            | 2 mm    |
| <b>r1s min</b>           | 2 mm    |
| <b>e</b>                 | 0.43    |
| <b>Y2</b>                | 1.38    |
| <b>Y0</b>                | 0.76    |
| <b>Mass</b>              | 4.96 kg |
| <b>ISO 355 reference</b> | T4EC130 |
| <b>Brand</b>             | NTN     |

## Product performance

|                                        |              |
|----------------------------------------|--------------|
| <b>Dynamic load, C</b>                 | 320 kN       |
| <b>Rating life coefficient, A2</b>     | 1            |
| <b>Static load, C0</b>                 | 545 kN       |
| <b>Nlim (oil)</b>                      | 2,200 Tr/min |
| <b>Nlim (grease)</b>                   | 1,700 Tr/min |
| <b>Min operating temperature, Tmin</b> | -40 °C       |
| <b>Max operating temperature, Tmax</b> | 120 °C       |

## Abutment dimensions

|                |        |
|----------------|--------|
| <b>da max</b>  | 142 mm |
| <b>db min</b>  | 144 mm |
| <b>Da max</b>  | 190 mm |
| <b>Db min</b>  | 192 mm |
| <b>ra max</b>  | 2 mm   |
| <b>r1a max</b> | 2 mm   |

## Calculation factors

### Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

| Fa / Fr ≤ e |   | Fa / Fr > e |    |
|-------------|---|-------------|----|
| X           | Y | X           | Y  |
| 1           | 0 | 0.4         | Y2 |

### Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

| X <sub>0</sub> | Y <sub>0</sub> |
|----------------|----------------|
| 0.5            | Y0             |

If  $P_0 < F_r$ , then use  $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table