



FAG


X-life

32005-X-XL

Tapered roller bearing

Tapered roller bearings 320, main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs

Technical information

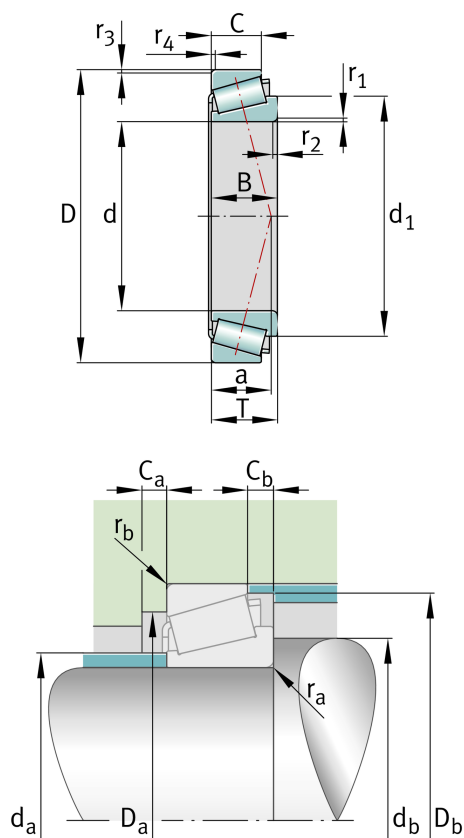

Main Dimensions & Performance Data

d	25 mm	Bore diameter
D	47 mm	Outside diameter
B	15 mm	Width, inner ring
C	11.5 mm	Width, outer ring
T	15 mm	Width, total
C _r	31,500 N	Basic dynamic load rating, radial
C _{0r}	34,000 N	Basic static load rating, radial
C _{ur}	4,800 N	Fatigue load limit, radial
n _G	18,900 1/min	Limiting speed
n _{gr}	9,000 1/min	Thermal speed rating
≈m	115 g	Weight

Mounting dimensions

d _{a max}	30 mm	Maximum diameter of shaft shoulder
d _{b min}	30 mm	Minimum diameter of shaft shoulder
D _{a min}	40 mm	Minimum diameter of housing shoulder
D _{a max}	42 mm	Maximum diameter of housing shoulder
D _{b min}	44 mm	Minimum diameter of housing shoulder
C _{a min}	3 mm	Minimum axial space
C _{b min}	3.5 mm	Minimum axial space
r _{a max}	0.6 mm	Maximum fillet radius of shaft
r _{b max}	0.6 mm	Maximum fillet radius of housing



Dimensions

$r_{1, 2 \text{ min}}$	0.6 mm	Minimum chamfer dimension of inner ring back face
$r_{3, 4 \text{ min}}$	0.6 mm	Minimum chamfer dimension of outer ring back face
a	12 mm	Distance between the apexes of the pressure cones
d_1	38.5 mm	Guidance rib diameter of inner ring

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Calculation factors

e	0.43	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	1.39	Dynamic axial load factor
Y_0	0.77	Static axial load factor

Additional information

	T4CC025	Comparative designation to ISO 10317 and ISO 355
--	---------	--