


2D LED Installation Guide

2D LED Replacement Installation




New Installation

- Connect live and neutral to the pins on opposite sides as shown in the diagram below.
- Install the LED 2D replacement into fixture.



Retrofit Installation: High Frequency

Remove electronic ballast and wire as shown in the diagram below:

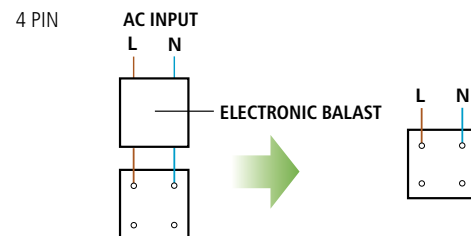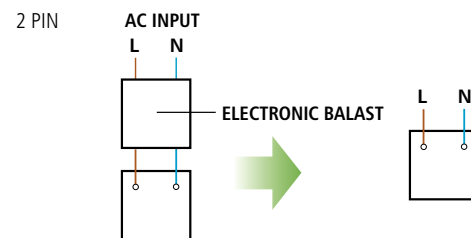


Retrofit Installation: Switch Start

- Remove the fluorescent starter.
- Install the LED 2D replacement into fixture.
(For optimal energy savings, bypassing the ballast is recommended - see New Installation)

14W 2D LED 4 Pin with Built-in Microwave Sensor Installation

New Installation

- Connect live and neutral to the pins on opposite sides as shown in the diagram below.
- Install the LED 2D replacement into fixture.



Retrofit Installation: Switch Start & High Frequency

Remove control gear and wire as shown in the diagram below:

