


Dust/Splash Proof (IP66) Digital Pressure Switch **ZSE4□D/ISE4□□D**

How to Order

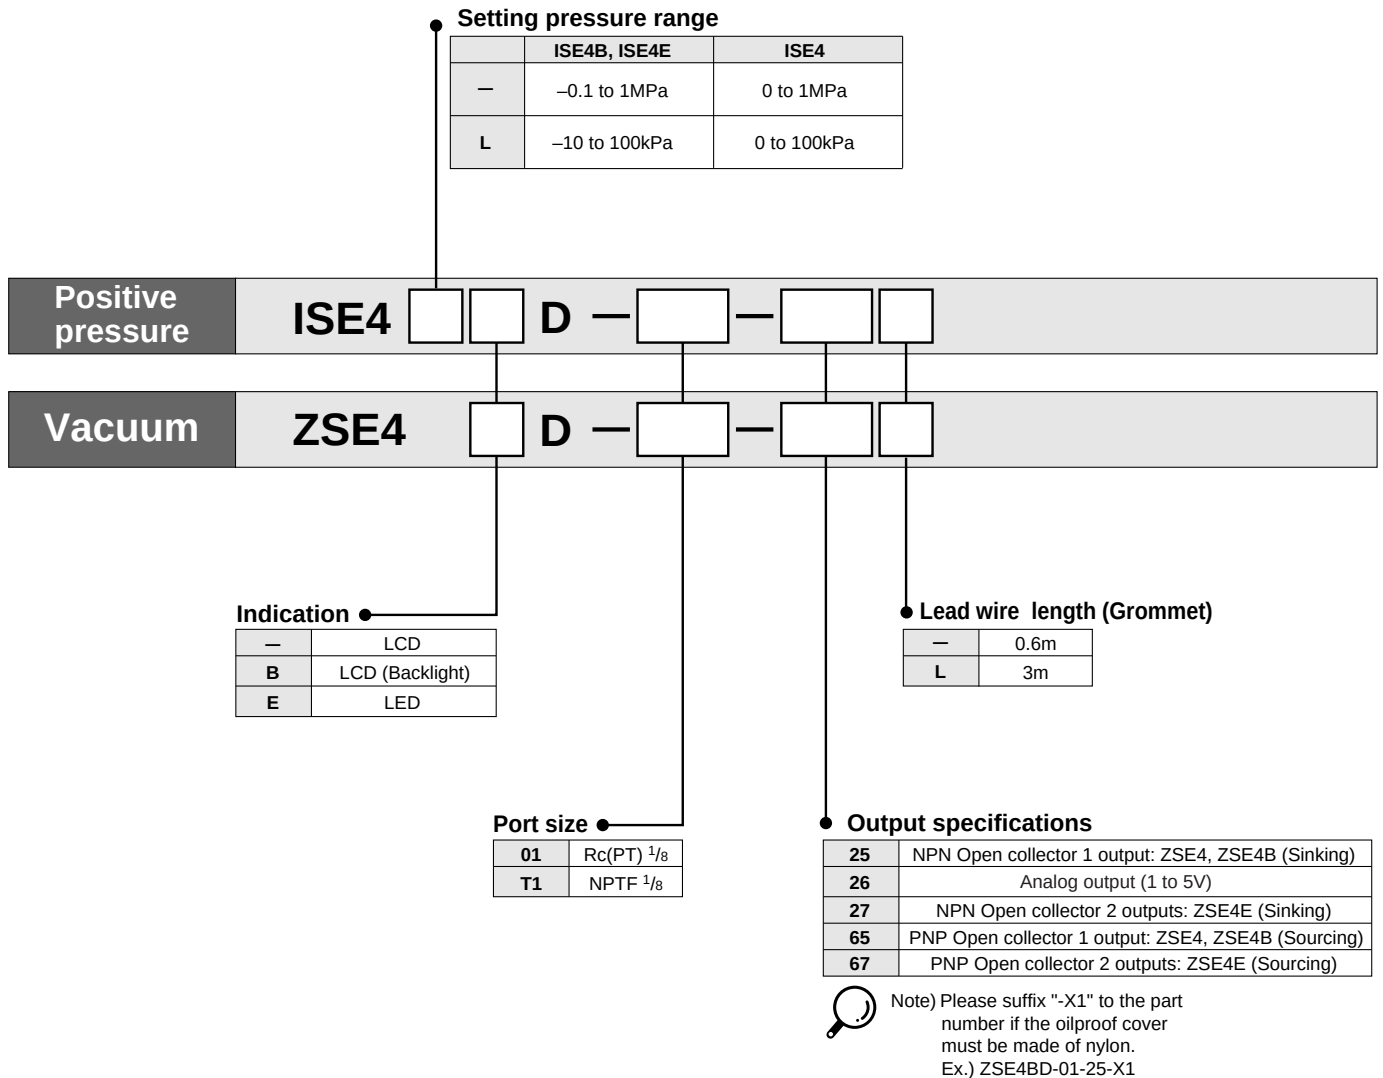

PSE

ZSE4
ISE4

ZSE5
ISE5

ZSE6
ISE6

ZSE3
ISE3

GS

PS

ISA

ZSE1
ISE1

ZSE2
ISE2

ZSP

IS□

ZSM

PF□

IF□

Specifications (Mechanical specifications of optional cover)

Model	ZSE4□D/ISE4□□D
Operating temperature range	0 to 50°C (No condensation)
Vibration resistance	10 to 500Hz Pulse width 1.5mm or acceleration 98m/s ² (smaller vibrations) to X, Y, Z direction (2 hrs)
Shock resistance	980m/s ² to X, Y, Z direction (3 times for each direction)
Lead wire	Grommet oil-resistant vinyl cabtire code −25, −26, −65 ø3.4 0.2mm ² 3core −27, −67 ø3.5 0.14mm ² 4core
Weight	110g (Including 0.6m-long lead wire)
Port size	01: Rc(PT) 1/8 T1: NPTF 1/8
Protective construction	IP66



Refer to the following pages for the details of each series.

- ZSE4/ISE4 Series → P.3.2-17
- ZSE4B/ISE4B Series → P.3.2-11
- ZSE4E/ISE4E Series → P.3.2-3