

Trunnion mounting MT5, MT6, Series CM1

- for mounting to the cylinder cover or base
- Suitable piston Ø 20 25 32 40 50 63 80 100 125 160 200 250 mm
- for series CCI, KPZ KPZ CCI, CVI, PRA/TRB CVI, PRA, TRB ITS, TRB



Weight

See table below

The delivered product may vary from that in the illustration.

Technical data


Part No.	Piston Ø	Housing material	Surface	Weight
1825805360	20 mm	Nodular graphite iron	galvanized	0,104 kg
1825805361	25 mm	Nodular graphite iron	galvanized	0,122 kg
R412026354	25 mm	Aluminum	anodized	-
1825805362	32 mm	Nodular graphite iron	galvanized	0,128 kg
1827001609	32 mm	Nodular graphite iron	galvanized	0,29 kg
1825805363	40 mm	Nodular graphite iron	galvanized	0,308 kg
1827001610	40 mm	Nodular graphite iron	galvanized	0,5 kg
1825805364	50 mm	Nodular graphite iron	galvanized	0,37 kg
1827001611	50 mm	Nodular graphite iron	galvanized	0,7 kg
1825805365	63 mm	Nodular graphite iron	galvanized	0,69 kg
1827002046	63 mm	Nodular graphite iron	galvanized	1,1 kg
1825805366	80 mm	Nodular graphite iron	galvanized	0,894 kg
1827001613	80 mm	Nodular graphite iron	galvanized	1,5 kg
1825805367	100 mm	Nodular graphite iron	galvanized	1,58 kg
1827001614	100 mm	Nodular graphite iron	galvanized	2,7 kg
1827001615	125 mm	Nodular graphite iron	galvanized	3,8 kg
1827001616	160 mm	Nodular graphite iron	galvanized	5,5 kg
1827001617	200 mm	Nodular graphite iron	galvanized	9,7 kg
1827001618	250 mm	Nodular graphite iron	galvanized	15,7 kg

Scope of delivery: trunnion mounting incl. mounting screws

Technical information

Material	
Material	Nodular graphite iron Aluminum
	galvanized anodized
Screws	Steel
	galvanized

Dimensions

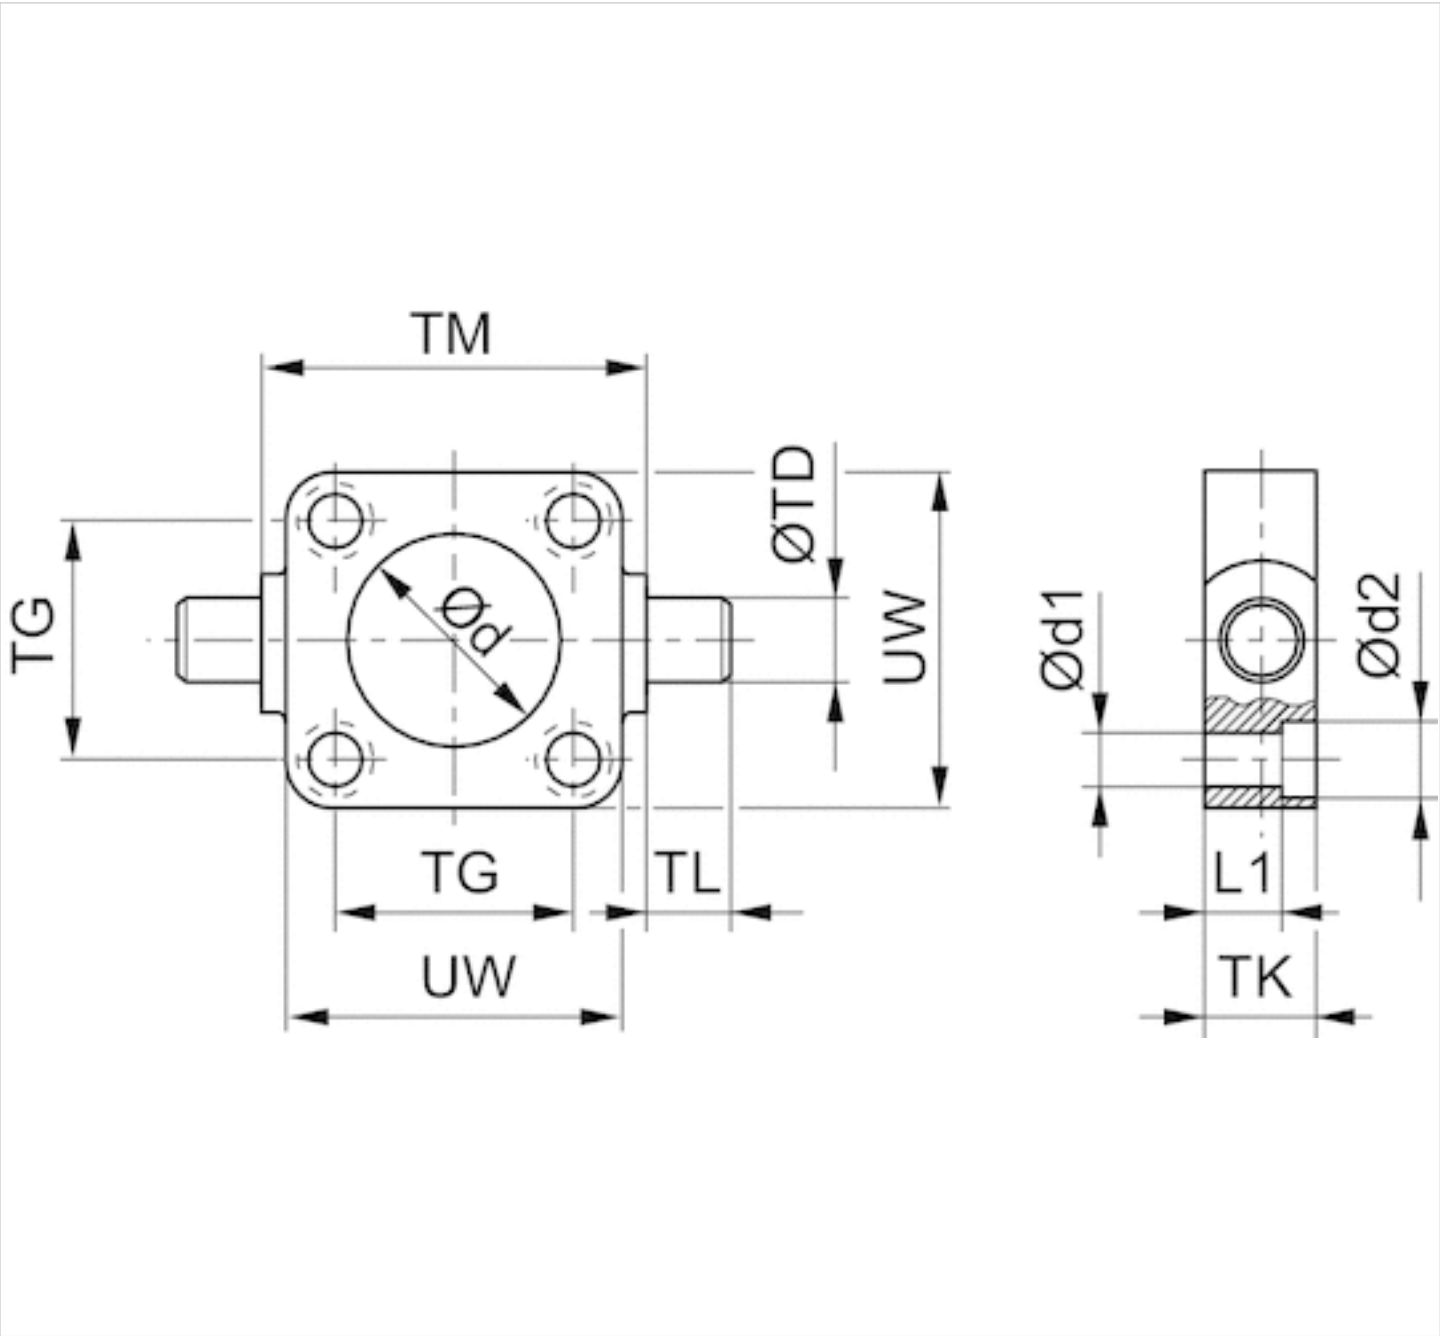

Dimensions

Part No.	Piston Ø	Ø d H11	Ø d1	Ø d2	L1	TD e9	TG ±0,2	TK	TL h14	TM h14	UW
1825805360	20 mm	18	5.5	10	8	12	22	14	12	38	35
1825805361	25 mm	22	5.5	10	8	12	26	14	12	42	39
R412026354	25 mm	24	5.5	10	8	12	26	14	12	42	39
1825805362	32 mm	32	6.6	10.5	7	12	32	14	12	52	46
1827001609	32 mm	30	6.6	11	7.5	12	32.5	16	12	50	48
1825805363	40 mm	46	6.6	11	12	16	42	19	16	63	59
1827001610	40 mm	35	6.6	11	7.5	16	38	20	16	63	56
1825805364	50 mm	53	9	14	10	16	50	19	16	75	69
1827001611	50 mm	40	9	15	10	16	46.5	24	16	75	65
1825805365	63 mm	69	9	15	15	20	62	24	20	90	84
1827002046	63 mm	45	9	15	10	20	56.5	24	20	90	75
1825805366	80 mm	87	11	18	13	20	82	24	20	110	102
1827001613	80 mm	45	11	18	16	20	72	28	20	110	100
1825805367	100 mm	55	11	18	18	25	103	29	25	132	125
1827001614	100 mm	55	11	18	25.5	25	89	38	25	132	120
1827001615	125 mm	60	14	20	34	25	110	46	25	160	145
1827001616	160 mm	65	18	26	38	32	140	50	32	200	184
1827001617	200 mm	75	18	26	40	32	175	60	32	250	224
1827001618	250 mm	90	22	33	57	40	220	70	40	320	286

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™