



FAG


32207-XL

Tapered roller bearing

Tapered roller bearings 322, main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs

X-life

Technical information

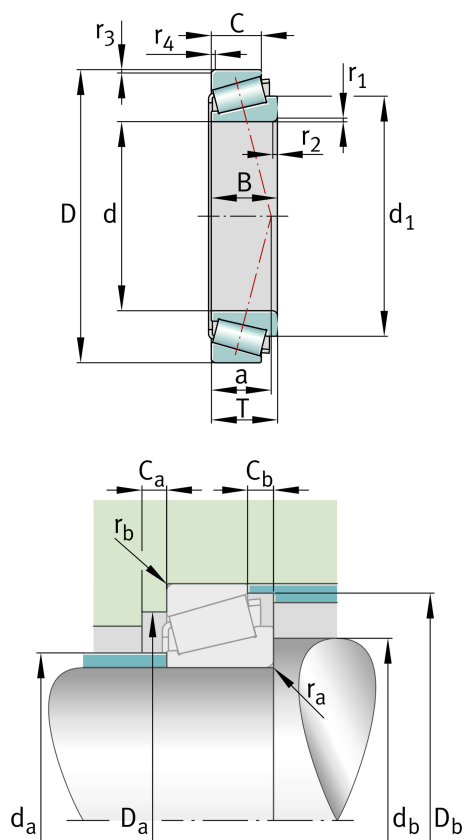

Main Dimensions & Performance Data

d	35 mm	Bore diameter
D	72 mm	Outside diameter
B	23 mm	Width, inner ring
C	19 mm	Width, outer ring
T	24.25 mm	Width, total
C _r	84,000 N	Basic dynamic load rating, radial
C _{0r}	85,000 N	Basic static load rating, radial
C _{ur}	13,700 N	Fatigue load limit, radial
n _G	12,500 1/min	Limiting speed
n _{gr}	6,000 1/min	Thermal speed rating
≈m	449 g	Weight

Mounting dimensions

d _{a max}	43 mm	Maximum diameter of shaft shoulder
d _{b min}	42 mm	Minimum diameter of shaft shoulder
D _{a min}	61 mm	Minimum diameter of housing shoulder
D _{a max}	65 mm	Maximum diameter of housing shoulder
D _{b min}	67 mm	Minimum diameter of housing shoulder
C _{a min}	3 mm	Minimum axial space
C _{b min}	5.5 mm	Minimum axial space
r _{a max}	1.5 mm	Maximum fillet radius of shaft
r _{b max}	1.5 mm	Maximum fillet radius of housing



Dimensions

$r_{1, 2 \text{ min}}$	1.5 mm	Minimum chamfer dimension of inner ring back face
$r_{3, 4 \text{ min}}$	1.5 mm	Minimum chamfer dimension of outer ring back face
a	18 mm	Distance between the apexes of the pressure cones
d_1	53.9 mm	Guidance rib diameter of inner ring

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Calculation factors

e	0.37	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	1.6	Dynamic axial load factor
Y_0	0.88	Static axial load factor

Additional information

	T3DC035	Comparative designation to ISO 10317 and ISO 355
--	---------	--