


Pilot-operated non-return valve, Series NR02

► Qn = 550 - 3000 l/min ► installing in piping



5340-051

Version

Working pressure min./max.

Ambient temperature min./max.

Medium temperature min./max.

Medium

Materials:

Housing

Seals

Poppet valve

3 bar / 10 bar

-25°C / +80°C

-10°C / +60°C


Compressed air

Die cast zinc

Acrylonitrile butadiene rubber

	Port 1	Port 2	Port 12	Qn 1 → 2 [l/min]	Weight [kg]	Fig.	Part No.
	G 1/8	R 1/8	G 1/8	550	0.132	Fig. 1	5340050010
	G 1/4	R 1/4	Ø 8x1	1000	0.132	Fig. 2	5340051000
	G 1/4	R 1/4	G 1/8	1000	0.132	Fig. 3	5340051010
	G 1/2	G 1/2	G 1/8	3000	0.335	Fig. 4	5340053000

Nominal flow Qn at 6 bar and Δp = 1 bar

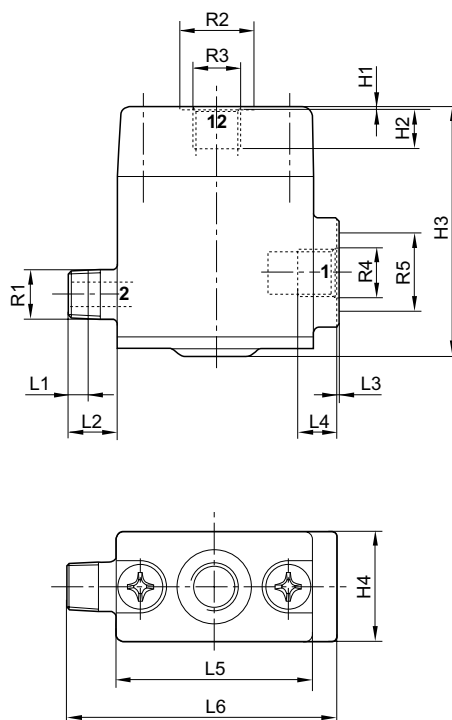Fig. 1


00128640

Part No.	R1	R2	R3	R4	R5	L1	L2	L3	L4	L5	L6	H1
5340050010	R1/8	15	G1/8	G1/8	16	4	10	0.3	8	40	55	0.3


Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information

Pneumatics catalog, online PDF, as of 2017-01-26, ©AVENTICS S.à r.l., subject to change

Pilot-operated non-return valve, Series NR02
▶ Qn = 550 - 3000 l/min ▶ installing in piping

Part No.	H2	H3	H4									
5340050010	8	50.5	22									

Fig. 2

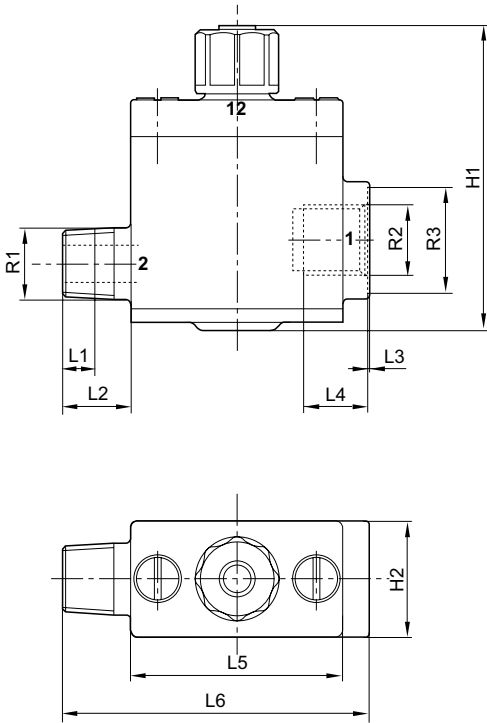

00128642

Part No.	R1	R2	R3	L1	L2	L3	L4	L5	L6	H1	H2	
5340051000	R1/4	G1/4	20	6	13	0.3	12	40	58	57.5	22	