

#### The Timken Company

4500 Mt Pleasant St. NW N. Canton, OH 44720


**Phone:** (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

# Part Number HM212011, Tapered Roller Bearings - Single Cups - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.





## <u>Specifications</u> | <u>Dimensions</u> | <u>Abutment and Fillet Dimensions</u> | <u>Factors</u>

Specifications –				
Series	HM212000			
Cup Part Number	HM212011			
Design Units	Imperial			

Dir	nensions		-
	D - Cup Outer Diameter	4.8125 in 122.238 mm	
	C - Cup Width	1.1700 in 29.718 mm	



r - Cup Backface "To Clear"	0.130 in
Radius <sup>1</sup>	3.3 mm
Da - Cup Frontface Backing	4.60 in
Diameter	116.10 mm
Db - Cup Backface Backing	4.25 in
Diameter	107.95 mm


Factors -			
e - ISO Factor <sup>2</sup>	0.34		
Y - ISO Factor <sup>3</sup>	1.78		
Cg - Geometry Factor <sup>4</sup>	0.0759		

 $<sup>^{1}</sup>$  These maximum fillet radii will be cleared by the bearing corners.

<sup>&</sup>lt;sup>2</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

 $<sup>^3</sup>$  These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>&</sup>lt;sup>4</sup> Geometry constant for Lubrication Life Adjustment Factor a3l.

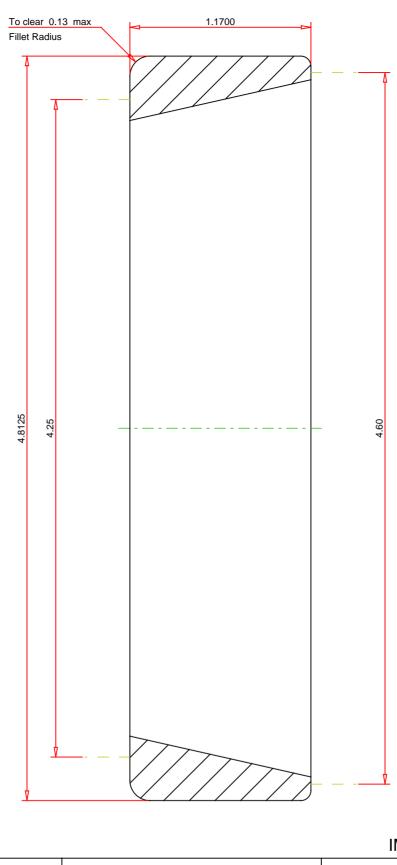

### **IMPERIAL UNITS**



THE TIMKEN COMPANY NORTH CANTON, OHIO USA

### HM212011

Tapered Roller Bearings - Single Cups - Imperial

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY