


SPARE LEGS SPARE PARTS



Puller	Leg reference (to be ordered by 2*)	Leg pin	Lmm	Tmm	L3mm	L1mm	L2mm	kg	For the puller go to page
U.34	U.34G (set of 2 legs)	M10 screw x 1.5 x 75 mm head H 17 mm, class 8.8	300	5,5	36	6	15,5	1,750	645
U.35	U.35C (set of 2 legs)	U.35-5J2 (set of 2 shear pins)	155	4	22	3,5	14,5	0,545	645
U.35L	U.35B (set of 2 legs)	U.35-5J2 (set of 2 shear pins)	188	4	22	3,5	14,5	0,705	645
U.35P	U.35D (set of 2 legs)	U.42-5J2 (set of 2 shear pins)	110	2,5	15	3	8,5	0,200	645
U.42	U.42-3	U.42-5J2 (set of 2 shear pins)	145	3	24	3	8	0,220	646
U.42B	U.42B3	U.42-5J2 (set of 2 shear pins)	194	3	24	3	8	0,290	646
U.52	U.52-3	U.35-5J2 (set of 2 shear pins)	198	4,5	25	4	21	0,380	646
U.232-65	U.232G1	-	100	4	8,5	10	16	0,080	643
U.232-90	U.232G2	-	155	5	10	15	24	0,190	643
U.232-130	U.232G2	-	155	5	10	15	24	0,190	643
U.232-160	U.232G3	-	225	8	15	22	33	0,580	643
U.232-210	U.232G3	-	225	8	15	22	33	0,580	643
U.232-270	U.232G4	-	303	11	17,5	25	43	1,550	643
U.232-340	U.232G4	-	303	11	17,5	25	43	1,550	643
U.301	U.301G	-	130	5	8	7	16	0,100	643
U.301-150	-	-	205	6	8	7	17	0,170	643
U.301-200	-	-	270	6	8	7	18	0,280	643
U.301L	-	-	180	4,5	21	7	18	0,220	645
U.301M	-	-	145	4	21	7	18,5	0,160	645
U.301P	-	-	120	4	17	5	12,5	0,120	645
U.302	U.301G	-	130	5	8	7	16	0,100	632
U.302-150	-	-	205	6	8	7	17	0,170	632
U.302-200	-	-	270	6	8	7	18	0,280	632
U.306-170N	U.306G20	-	230	6,5	8	4	12	0,190	630
U.306-180	U.306G10	-	250	5	14	4	13	0,320	630
U.306-260	U.306G15	-	310	6,5	14	4	13	0,450	630
U.306A130N	U.306G2	-	170	4,5	8	3,5	9,5	0,120	630
U.306A140	U.306G1	-	185	4,5	14	4	13	0,210	630
U.310-170	U.310G1	-	230	6	26	5	19	0,560	630
U.310-230N	U.310G3	-	260	10	15	5,5	15	0,360	630
U.310-250	U.310G2	-	310	7	26	5,5	19	0,760	631
U.312H	U.312G110	U.312-04-02 (set of 3 screws + nuts)	150	7	25	15	33	0,400	636
U.312H	U.312G160	U.312-04-02 (set of 3 screws + nuts)	190	7	25	15	36	0,540	636
U.312H	U.312G210	U.312-04-02 (set of 3 screws + nuts)	240	7	25	12	36	0,720	636
U.312H	U.312G260	U.312-04-02 (set of 3 screws + nuts)	285	7	25	12	38	0,980	636
U.320	U.320-13A	U.320GP1 (set of 3 shear pins)	505	5	35,6	16	45	3,100	635
U.320H	U.320-13A	U.320GP1 (set of 3 shear pins)	505	5	35,6	16	45	3,100	638
U.330	U.330-08	U.320GP1 (set of 3 shear pins)	690	8,5	37,5	15,5	45	6,300	635
U.330H	U.330-08	U.320GP1 (set of 3 shear pins)	690	8,5	37,5	15,5	45	6,300	638

* except U.35B, U.35C, U.35D and U.34: set containing the inside leg and outside leg.

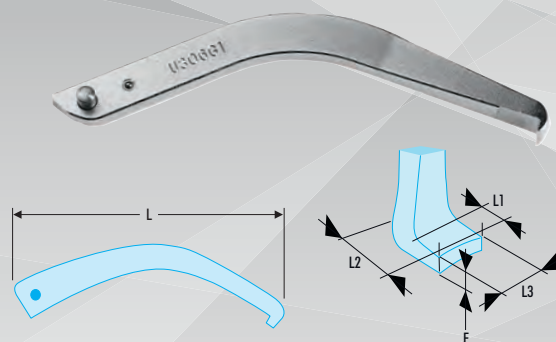

- For your safety, we recommend that all the legs are replaced in the event of a problem.
- Do not modify nor grind the puller legs. Modifications can be very dangerous for the user and invalidates the guarantee.
- Wherever possible, select a 3-leg puller for optimum load distribution.