



FAG


32208-XL

Tapered roller bearing

Tapered roller bearings 322, main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs

X-life

Technical information

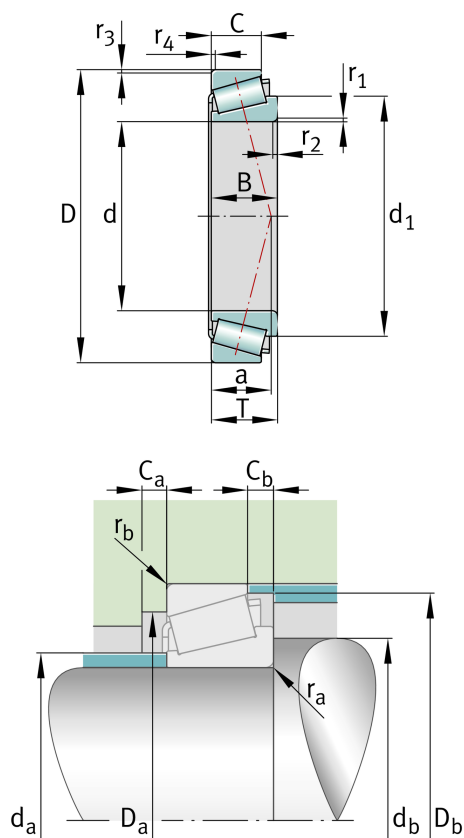

Main Dimensions & Performance Data

d	40 mm	Bore diameter
D	80 mm	Outside diameter
B	23 mm	Width, inner ring
C	19 mm	Width, outer ring
T	24.75 mm	Width, total
C _r	94,000 N	Basic dynamic load rating, radial
C _{0r}	94,000 N	Basic static load rating, radial
C _{ur}	15,000 N	Fatigue load limit, radial
n _G	11,200 1/min	Limiting speed
n _{gr}	5,300 1/min	Thermal speed rating
≈m	0.542 kg	Weight

Mounting dimensions

d _{a max}	48 mm	Maximum diameter of shaft shoulder
d _{b min}	47 mm	Minimum diameter of shaft shoulder
D _{a min}	68 mm	Minimum diameter of housing shoulder
D _{a max}	73 mm	Maximum diameter of housing shoulder
D _{b min}	75 mm	Minimum diameter of housing shoulder
C _{a min}	3 mm	Minimum axial space
C _{b min}	5.5 mm	Minimum axial space
r _{a max}	1.5 mm	Maximum fillet radius of shaft
r _{b max}	1.5 mm	Maximum fillet radius of housing



Dimensions

$r_{1, 2 \text{ min}}$	1.5 mm	Minimum chamfer dimension of inner ring back face
$r_{3, 4 \text{ min}}$	1.5 mm	Minimum chamfer dimension of outer ring back face
a	19 mm	Distance between the apexes of the pressure cones
d_1	60 mm	Guidance rib diameter of inner ring

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Calculation factors

e	0.37	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	1.6	Dynamic axial load factor
Y_0	0.88	Static axial load factor

Additional information

	T3DC040	Comparative designation to ISO 10317 and ISO 355
--	---------	--