


Valves Series TMCU



Unidirectional flow controller for mounting on single-acting or double-acting cylinders.
Adjustment of setting by a hexagonal male key or a manually operated knurled screw.
Ports: G1/8, G1/4, G3/8, G1/2

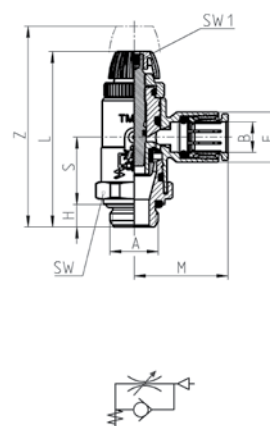


DIMENSIONS

Mod.	A	B	F	H	L	M	S	SW	SW1	Z
TMCU 972-1/8-4	G1/8	4	11,5	5	41	21,5	16,5	16	1,5	48
TMCU 974-1/8-6	G1/8	6	11,5	5	41	21,5	16,5	16	1,5	48
TMCU 974-1/4-6	G1/4	6	11,5	6	42	21,5	16,5	17	1,5	49
TMCU 976-1/8-8	G1/8	8	13,5	5	45	25	17,5	19	2,5	52
TMCU 976-1/4-8	G1/4	8	13,5	6	46,5	25	18	19	2,5	53,5
TMCU 976-3/8-8	G3/8	8	13,5	7	47,5	25	18	20	2,5	54,5
TMCU 978-3/8-10	G3/8	10	16	7	49	29	17	25	2,5	57,5
TMCU 978-1/2-10	G1/2	10	16	8	50	29	17	25	2,5	58,5

Valves Series TMVU



Unidirectional flow controller for mounting on valves.
Adjustment of setting by a hexagonal male key or a manually operated knurled screw.
Ports: G1/8, G1/4, G3/8, G1/2

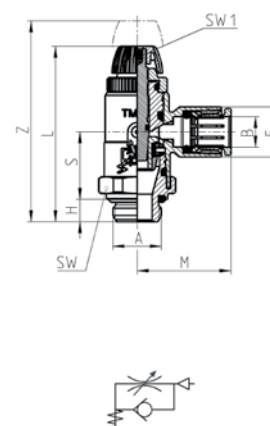


DIMENSIONS

Mod.	A	B	F	H	L	M	S	SW	SW1	Z
TMVU 972-1/8-4	G1/8	4	11,5	5	41	21,5	16,5	16	1,5	48
TMVU 974-1/8-6	G1/8	6	11,5	5	41	21,5	16,5	16	1,5	48
TMVU 974-1/4-6	G1/4	6	11,5	6	42	21,5	16,5	17	1,5	49
TMVU 976-1/8-8	G1/8	8	13,5	5	45	25	17,5	19	2,5	52
TMVU 976-1/4-8	G1/4	8	13,5	6	46,5	25	18	19	2,5	53,5
TMVU 976-3/8-8	G3/8	8	13,5	7	47,5	25	18	20	2,5	54,5
TMVU 978-3/8-10	G3/8	10	16	7	49	29	17	25	2,5	57,5
TMVU 978-1/2-10	G1/2	10	18	8	50	29	17	25	2,5	58,5

Valves Series TMCO



Bidirectional flow controller.
Adjustment of setting by a hexagonal male key or a manually operated knurled screw.
Ports: G1/8, G1/4, G3/8, G1/2

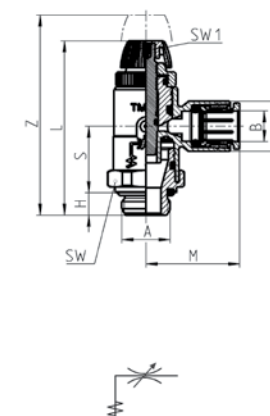

DIMENSIONS

Mod.	A	B	F	H	L	M	S	SW	SW1	Z
TMCO 972-1/8-4	G1/8	4	11,5	5	41	21,5	16,5	16	1,5	48
TMCO 974-1/8-6	G1/8	6	11,5	5	41	21,5	16,5	16	1,5	48
TMCO 974-1/4-6	G1/4	6	11,5	6	42	21,5	16,5	17	1,5	49
TMCO 976-1/8-8	G1/8	8	13,5	5	45	25	17,5	19	2,5	52
TMCO 976-1/4-8	G1/4	8	13,5	6	46,5	25	18	19	2,5	53,5
TMCO 976-3/8-8	G3/8	8	13,5	7	47,5	25	18	20	2,5	54,5
TMCO 978-3/8-10	G3/8	10	16	7	49	29	17	25	2,5	57,5
TMCO 978-1/2-10	G1/2	10	16	8	50	29	17	25	2,5	58,5