


Salamandre® lighting trunking

lengths, lids and fittings

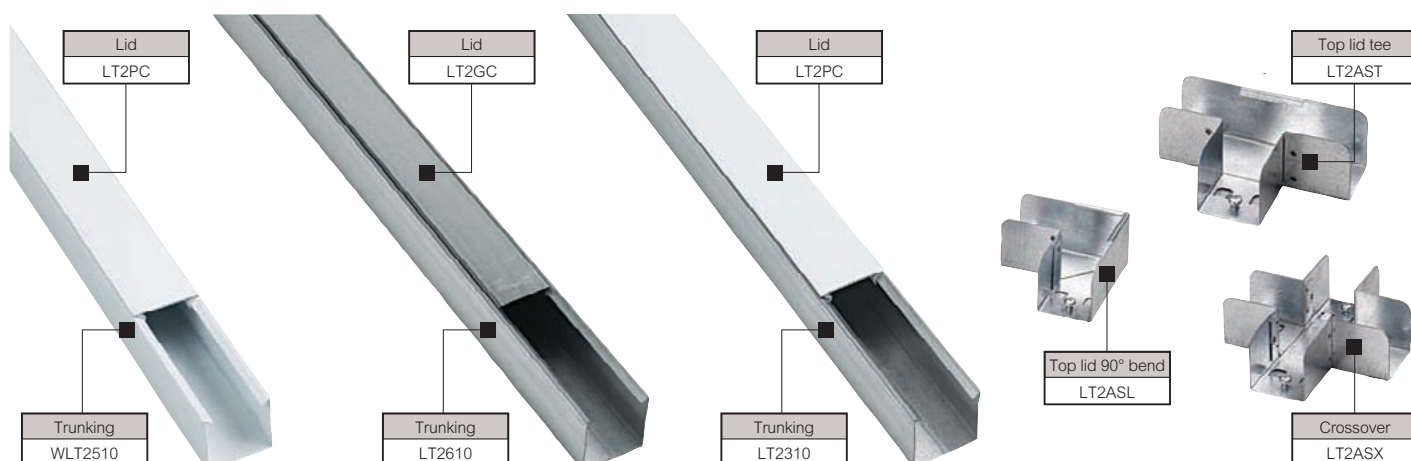

Selection chart (p. 17)
Dimensions and technical information (p. 31)

A 'clip-in' lid trunking system for fast installation
Available with a choice of 3 lids in plastic or galvanised finishes
For white powder coated finish to RAL 9003 product code starts WLT2,
for pre-galvanised code starts LT2
All lighting trunking fittings have friction grip to aid quick installation

Pack	Cat. Nos.	Trunking lengths
1	WLT2510	Lids and couplers not included White Nominal steel thickness 1.0 mm 50 mm x 50 mm – 5 m
1	LT2310	Galvanised Nominal steel thickness 1.0 mm 50 mm x 50 mm – 3 m
1	LT2410	50 mm x 50 mm – 4 m
1	LT2510	50 mm x 50 mm – 5 m
1	LT2610	50 mm x 50 mm – 6 m
1	LT2GC WLT2GC	Lids Lids – galvanised 2 m length Standard width Standard width – painted
1	LT2PC	Lid – white plastic 2 m length Standard width

Pack	Cat. Nos.	Fittings
1	LT2C	Long coupler 50 mm x 50 mm
1	LT2ASL WLT2ASL	Top lid 90° bends 50 mm x 50 mm 50 mm x 50 mm – white
1	LT2BSL WLT2BSL	Inside lid 90° bends 50 mm x 50 mm 50 mm x 50 mm – white
1	LT2CSL WLT2CSL	Outside lid 90° bends 50 mm x 50 mm 50 mm x 50 mm – white
1	LT2AL WLT2AL	Top lid 45° bends 50 mm x 50 mm 50 mm x 50 mm – white
1	LT2BL WLT2BL	Inside lid 45° bends 50 mm x 50 mm 50 mm x 50 mm – white
1	LT2CL WLT2CL	Outside lid 45° bends 50 mm x 50 mm 50 mm x 50 mm – white
1	LT2AST WLT2AST	Top lid tees 50 mm x 50 mm 50 mm x 50 mm – white
1	LT2BST WLT2BST	Inside lid tees 50 mm x 50 mm 50 mm x 50 mm – white
1	LT2CST WLT2CST	Outside lid tees 50 mm x 50 mm 50 mm x 50 mm – white
1	LT2ASX WLT2ASX	Crossovers 50 mm x 50 mm 50 mm x 50 mm – white