




Technical datasheet

6016LLB/2AS

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, non-contact seals on both sides

Visual(s)

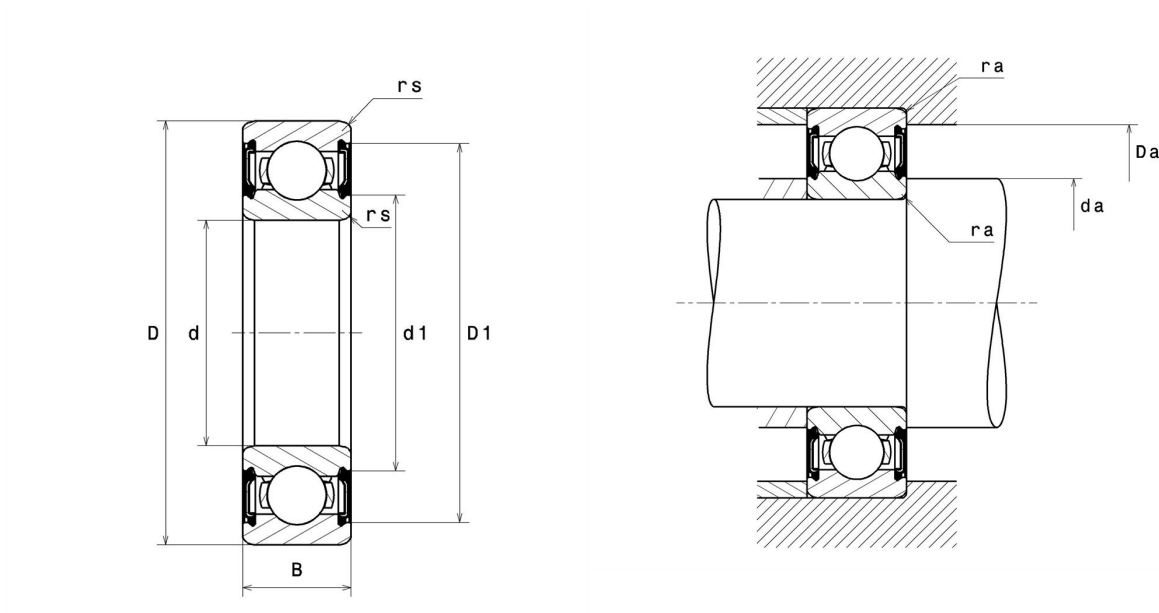

Product definition

d	80 mm
D	125 mm
B	22 mm
rs min	1.1 mm
Radial clearance class	CN
Mass	0.85 kg
Brand	NTN

Product performance

Dynamic load, C	47.5 kN
Static load, C0	40 kN
Fatigue limit load, Cu	1.8 kN
f0	15.6
Nlim (grease)	5,300 rpm
Min operating temperature, Tmin	-25 °C
Max operating temperature, Tmax	110 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.46 Hz
Characteristic outer ring frequency, BPF0	6.08 Hz
Characteristic inner ring frequency, BPFI	7.92 Hz

Abutment dimensions

da min	86.5 mm
da max	91.5 mm
Da max	118.5 mm
ra max	1 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$