



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 72213C, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

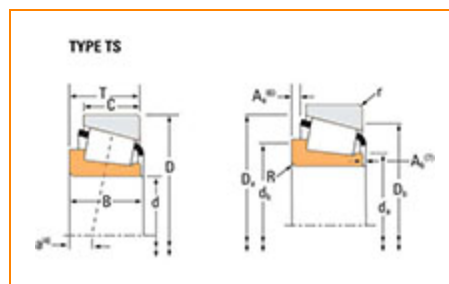

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

| | |
|---|-----------------------|
| Series | 72000C |
| Cone Part Number | 72213C |
| Design Units | Imperial |
| Cage Type | Stamped Steel |
| C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)¹ | 83900 lbf 373000 N |
| C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)² | 21700 lbf 96700 N |



Dimensions

| | |
|----------------------|------------------------|
| d - Cone Bore | 2.1250 in 53.975 mm |
|----------------------|------------------------|

| | |
|-----------------------|------------------------|
| B - Cone Width | 1.2910 in 32.791 mm |
|-----------------------|------------------------|

Abutment and Fillet Dimensions

| | |
|--|---------------------|
| R - Cone Backface "To Clear" Radius³ | 0.14 in 3.600 mm |
|--|---------------------|

| | |
|---|------------------|
| da - Cone Frontface Backing Diameter | 2.64 in 67 mm |
|---|------------------|

| | |
|--|------------------|
| db - Cone Backface Backing Diameter | 3.11 in 79 mm |
|--|------------------|

| | |
|---|------------------|
| Ab - Cage-Cone Frontface Clearance | 0.2 in 5.1 mm |
|---|------------------|

| | |
|--|-------------------|
| Aa - Cage-Cone Backface Clearance | 0.15 in 3.8 mm |
|--|-------------------|

| | |
|--|-----------------|
| a - Effective Center Location⁴ | 0.08 in 2 mm |
|--|-----------------|

Basic Load Ratings

| | |
|---|----------------------|
| C90 - Dynamic Radial Rating (90 million revolutions)⁵ | 12500 lbf 55500 N |
|---|----------------------|

| | |
|---|-----------------------|
| C1 - Dynamic Radial Rating (1 million revolutions)⁶ | 48200 lbf 214000 N |
|---|-----------------------|

| | |
|----------------------------------|-----------------------|
| C0 - Static Radial Rating | 46800 lbf 208000 N |
|----------------------------------|-----------------------|

| | |
|---|----------------------|
| C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷ | 15800 lbf 70100 N |
|---|----------------------|

Factors

| | |
|---|--------|
| K - Factor⁸ | 0.79 |
| G1 - Heat Generation Factor (Roller-Raceway) | 57.4 |
| G2 - Heat Generation Factor (Rib-Roller End) | 13.5 |
| Cg - Geometry Factor⁹ | 0.0825 |

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a_3 .

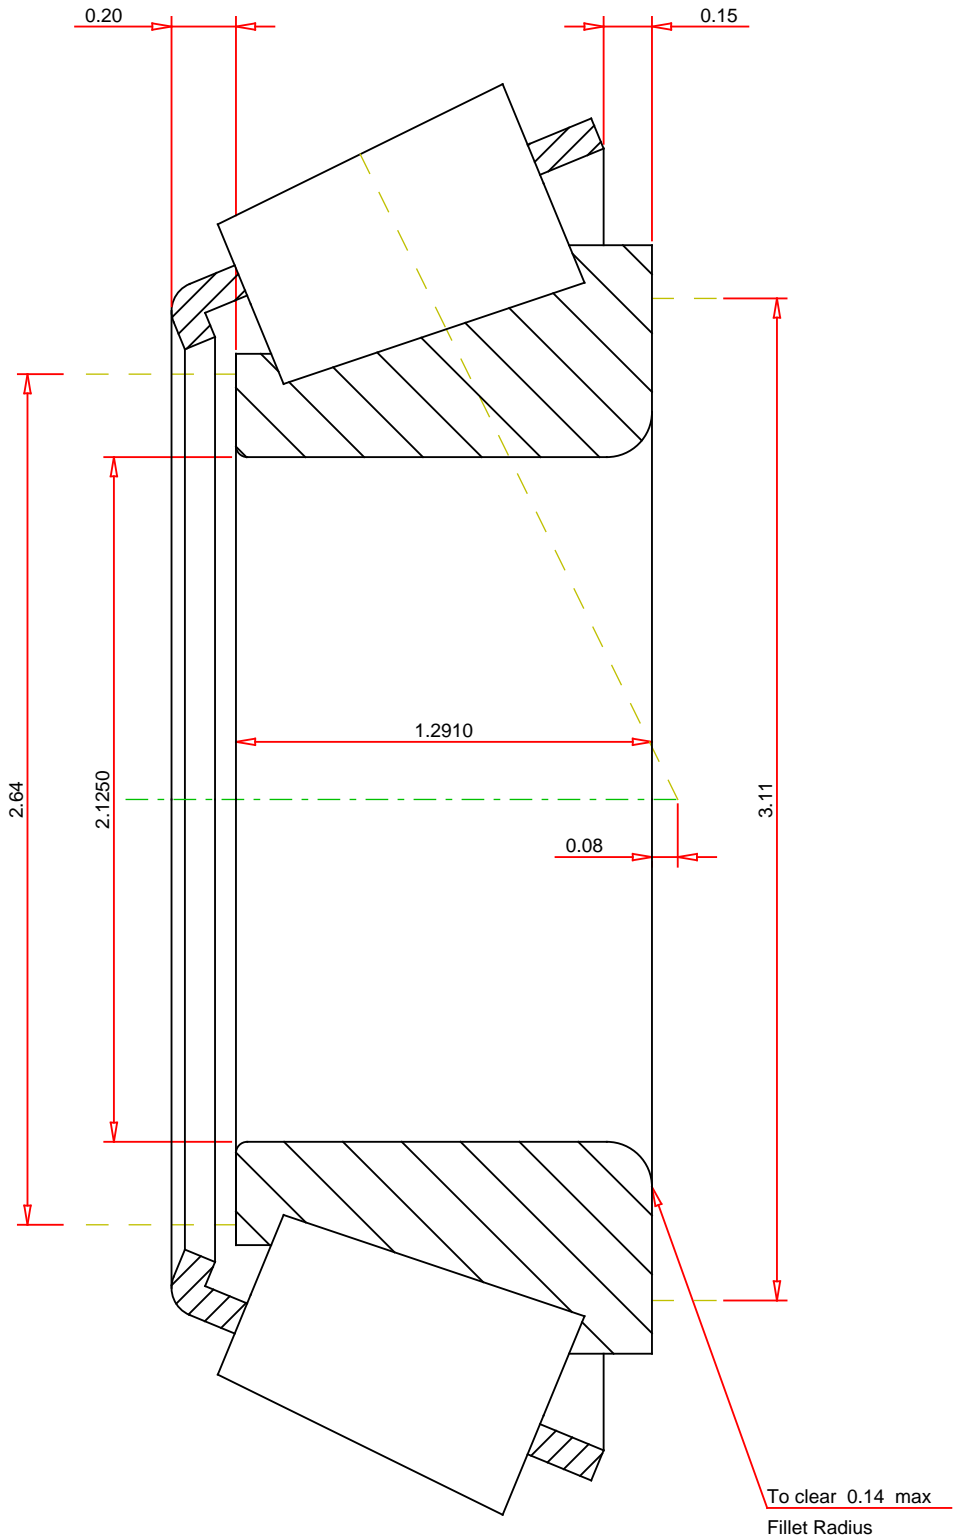

IMPERIAL UNITS

| | | |
|--|---|--|
| <div>Number of Rollers Per Row16</div> | <div><div>TIMKEN®</div><div>THE TIMKEN COMPANY</div><div>NORTH CANTON, OHIO USA</div></div> | <div><div>72213C</div><div>Tapered Roller Bearings - Single Cones - Imperial</div></div> <div><div><div>K Factor</div><div>Dynamic Radial Rating - C90</div><div>Dynamic Thrust Rating - Ca90</div><div>Dynamic Radial Rating - C1</div></div><div><div>0.79</div><div>55500</div><div>70100</div><div>214000</div></div><div><div>lbf</div><div>lbf</div><div>lbf</div></div></div> |
|--|---|--|