



Technical data

EXPE216


Bearing units

Grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

KIT CONTENT

EX216G2, PE216

VISUAL (S)

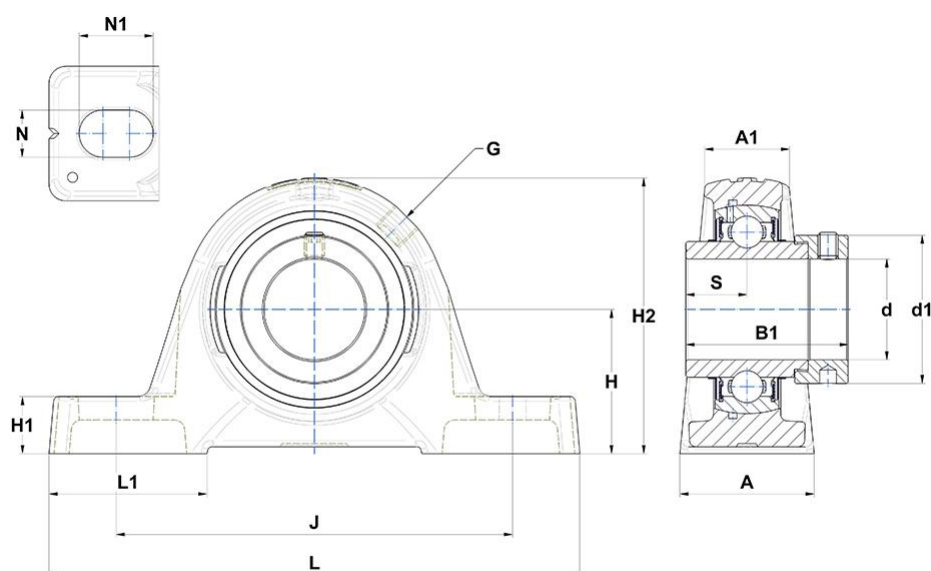

PRODUCT DIMENSIONS

A - Housing width	78 mm
A1 - Housing top width	55 mm
B - Width of Inner Ring	74,6 mm
d - Shaft diameter	80 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	110 mm
G - Grease fitting	R1/8"

PRODUCT DIMENSIONS

H - Distance mounting base to centerline spheric. seating diam.	89 mm
H1 - Housing foot height	30 mm
H2 - Housing height	175 mm
J - Mounting holes distance	232 mm
L - Housing length	290 mm
L1 - Housing foot length	90 mm
N - Mounting hole dimension	26 mm
N1 - Mounting hole length	34 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	37,3 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	72,5 kN
C0 - Static load rating	54,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	9,42 kg
Recommended tightening torque for set screw	33 N-m