


## Technical data

### UCP.209

Bearing units

grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

## Visual(s)

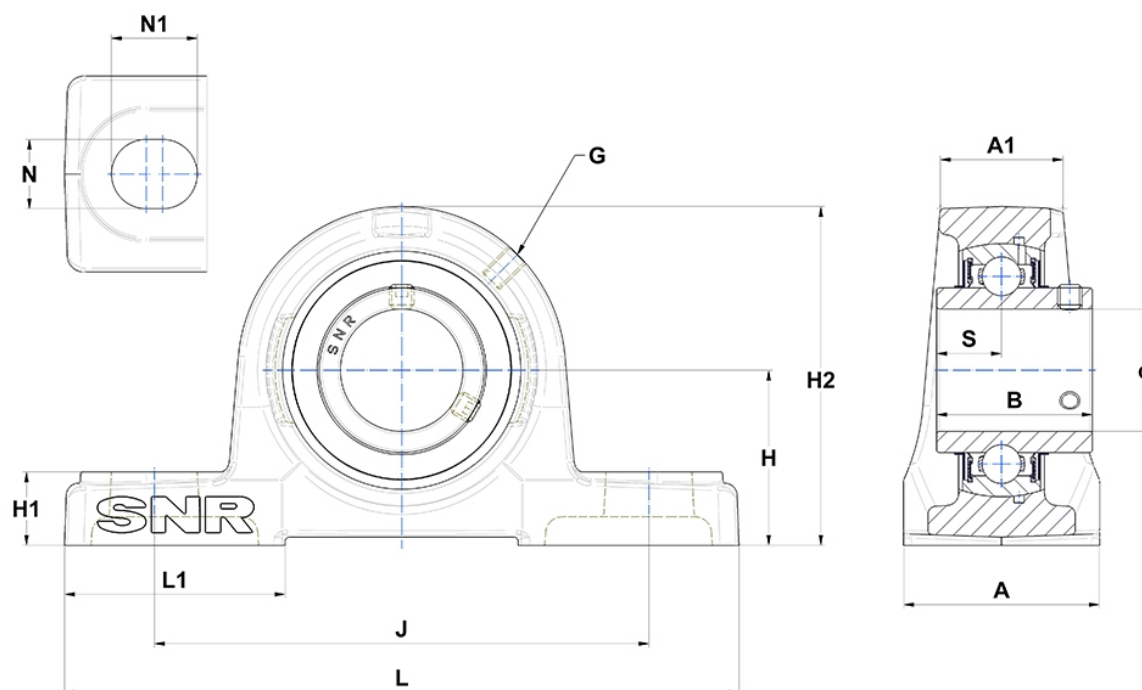

## Product definition

|           |         |
|-----------|---------|
| <b>A</b>  | 54 mm   |
| <b>A1</b> | 37 mm   |
| <b>B</b>  | 49.2 mm |
| <b>d</b>  | 45 mm   |
| <b>G</b>  | M6x1    |
| <b>H</b>  | 54 mm   |
| <b>H1</b> | 20 mm   |
| <b>H2</b> | 108 mm  |
| <b>J</b>  | 146 mm  |
| <b>L</b>  | 190 mm  |
| <b>L1</b> | 60 mm   |
| <b>N</b>  | 17mm    |
| <b>N1</b> | 23 mm   |
| <b>s1</b> | 24.6 mm |
| <b>S</b>  | 19 mm   |

## Product performance

|               |          |
|---------------|----------|
| <b>C</b>      | 31.85 kN |
| <b>C0</b>     | 20.8 kN  |
| <b>T min.</b> | -20 °C   |
| <b>T max.</b> | 100 °C   |

## Other features

|                                                    |         |
|----------------------------------------------------|---------|
| <b>Weight</b>                                      | 2.38 kg |
| <b>Recommended tightening torque for set screw</b> | 11.5 Nm |
| <b>Designation of housing</b>                      | P209-   |
| <b>Designation of bearing</b>                      | UC209G2 |