


⑦ Power Supply Cable (7/8 inch connector, For EX600-ED3)


PCA-1558810	Straight 2 m
PCA-1558823	Straight 6 m
PCA-1558836	Right angled 2 m
PCA-1558849	Right angled 6 m



Straight connector type

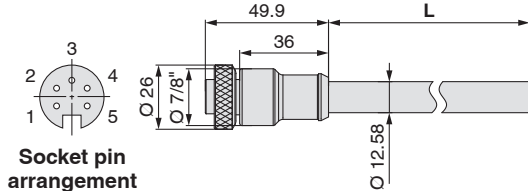


Socket pin arrangement

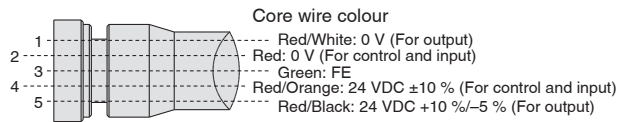


Connections

Angled connector type

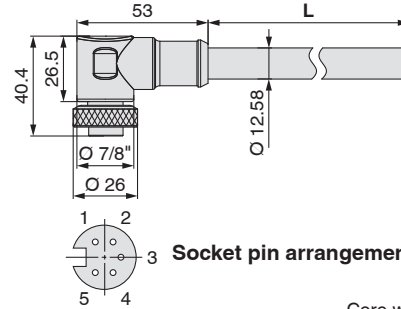

Socket pin arrangement

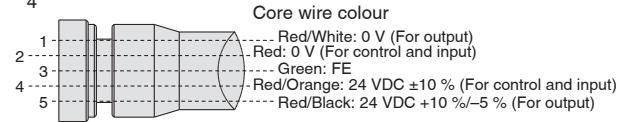

Connections

Item	Specifications
Cable O.D.	12.58 mm
Conductor nominal cross section	1.5 mm ² /AWG16
Wire O.D. (Including insulator)	2.35 mm
Min. bending radius (Fixed)	110 mm

⑧ Power Supply Field-wireable Connector (7/8 inch)

PCA-1578081	Socket [compatible with AWG22-16]
-------------	-----------------------------------



Applicable Cable

Item	Specifications
Cable O.D.	12.0 to 14.0 mm
Wire gauge (Stranded wire cross section)	0.34 to 1.5 mm ² AWG22 to 16



⑨ Power Supply Cable (M12 connector, For EX600-ED2) * The shape of the M12 connector is B-coded (Reverse key).

PCA-1564927	Straight 2 m
PCA-1564930	Straight 6 m
PCA-1564943	Right angled 2 m
PCA-1564969	Right angled 6 m



SPEEDCON



Straight connector type

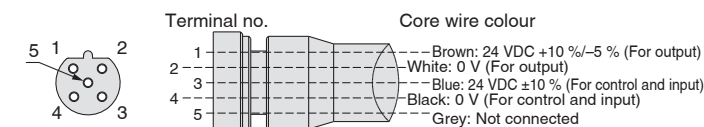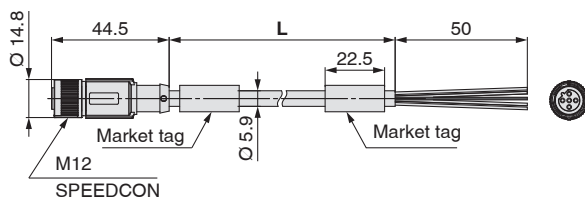

Socket connector pin arrangement
B-coded (Reverse key)

Connections

Angled connector type

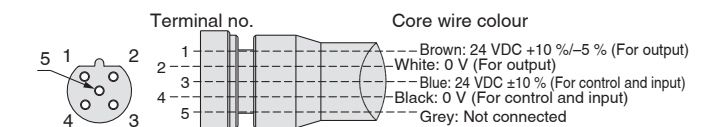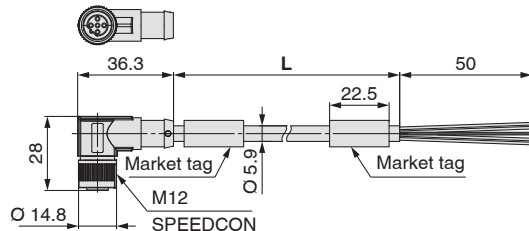

Socket connector pin arrangement
B-coded (Reverse key)

Connections

Item	Specifications
Cable O.D.	5.9 mm
Conductor nominal cross section	0.34 mm ² /AWG22
Wire O.D. (Including insulator)	1.27 mm
Min. bending radius (Fixed)	59 mm