

Product Code:

AYXLM2

Product Range:

Isolator Controlled

Issue Date:

27/11/17

Issue by:

S.A.H.

Description:

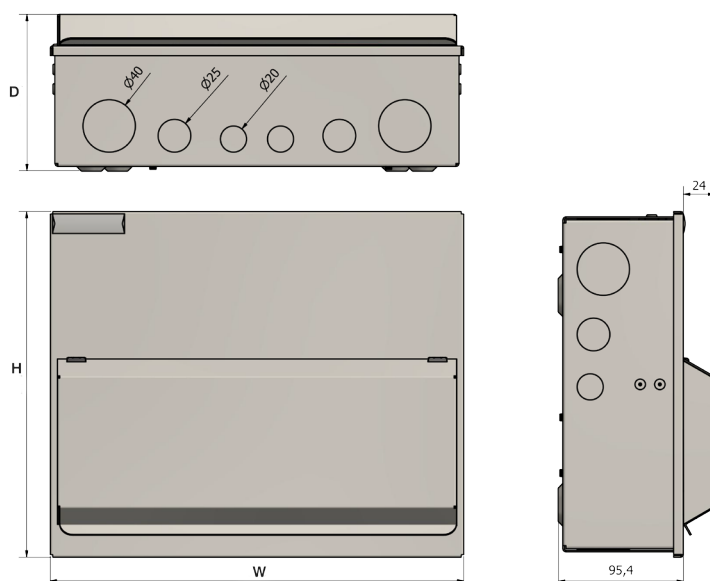
 2 Way 63A Double Pole Switch Disconnecter Incomer
Metalclad Consumer Unit

Features:

- Proteus Isolator controlled metal clad consumer units
- Available range of outgoing circuits from 1 to 26 way
- Incoming Isolator fitted can be a choice of either 45A, 63A, or 100A
- Units will accept 6kA and 10kA MCBs, RCBOs and HRC fuse carriers
- Amendment 3 compliant
- Non-combustible enclosure


Technical:

Standard	BSEN61439-3
Current Rating	63 A
Voltage Rating	230 V
Material	Steel
Colour	Matt White
IP Rating	IP30
Cable Entry	Selection Of Knockouts/ Cutouts
No. of Modules	4
No. of Outgoing Ways	2
Short Circuit Rating	16kA
Terminal Capacity (In)	50 mm ²
Incomer Device	63 A Isolator

Dimensions:


Cat. No.	H (mm)	W (mm)	D (mm)
AYXLM2	232	149	90
AYXLM4U	256	201	110
AYXLM6U	256	273	110
AYXLM8U	256	273	110
AYXLM10U	256	309	110
AYXLM12U	256	381	110
AYXLM14U	256	381	110
AYXLM16U	256	417	110
AYXLM18U	256	489	110
AYXLM20U	256	489	110
AYXLM26U	256	597	110