

Type : 2EL063M2A-PC-A0-C34

RE: 894644

Date : 03.01.2022

Power [kW] : 0.18
 Input Voltage [V] : 400
 Connection Type [Δ / Y] : Y
 Frequency [Hz] : 50
 Pole Number : 2
 Nominal Speed [rpm] : 2800
 Nominal Current [A] : 0.50
 Nominal Moment [Nm] : 0.61
 Nominal Efficiency [η] : 67.5
 Power Factor [cosφ] : 0.77
 Locked Rotor Current [Ia/In] : 4.5
 Locked Rotor Torque [Ma/Mn] : 2.9
 Breakdown Torque [Mk/Mn] : 3.0
 Motor Color : RAL 7031
 Ambient Temperature : -15°C / +40°C

Efficiency Class : IE2
 Duty Cycle : S1
 Service Factor : 1.15
 Frame Size : 063M
 Weight [kg] : 3.80
 Insulation Class : F [155°C]
 Temperature Rise : B [80°K]
 Protection Class : IP55
 Vibration Severity Grade : A
 Method of Cooling : IC411
 Direction of Rotation : Bidirectional
 Balance : Half Key
 Motor Protection : --
 Altitude Above Sea Level : 1000m
 Sound Pressure Level [dBA] : 51

ELECTRICAL DATA

Δ / Y	U [V]	f [Hz]	P [kW]	n [rpm]	I [A]	η [%]	cosφ
Δ	230	50	0.18	2800	0.87	67.5	0.77
Y	400	50	0.18	2800	0.50	67.5	0.77
Y	460	60	0.21	3395	0.49	69.5	0.77


MECHANICAL DATA

Moment of Inertia [kgm²] : 0.00012
 Bearing DS / NS : 6201ZZ / 6201ZZ
 Frame Material : Aluminum
 Flange Type / Material : B34 / Aluminum
 Cooling Fan Material : Plastic
 End Shield Material : Aluminum

TERMINAL BOX

Terminal Box Material : Aluminum
 Terminal Box Position : Top
 Terminal Box Cable Entry : M16x1.5
 Terminal Box Blind Cap : M16x1.5
 Contact Screw Thread : M4

MECHANICAL DIMENSIONS

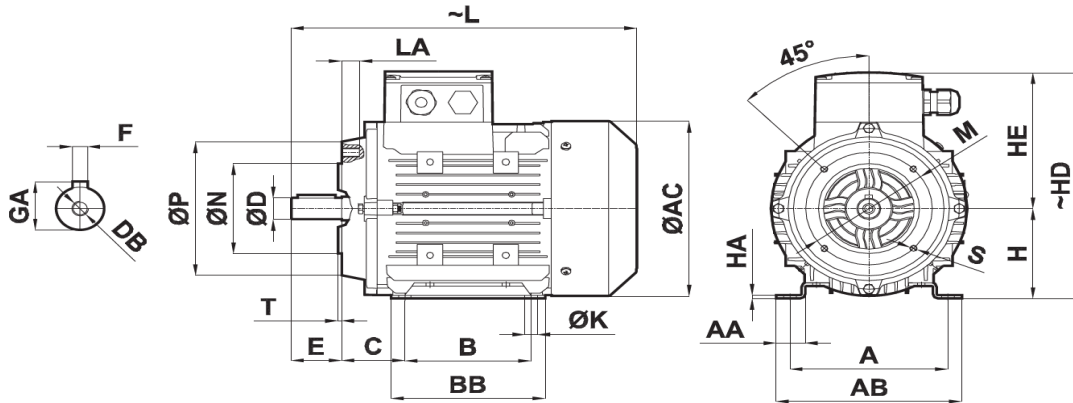

FLANGE TYPE	D	N	P	E	T	LA	L	AC	S	M	H	HE	HD	F	GA	DB	C	ØK	B	BB	HA	AA	A	AB
B34	11	60	90	23	2.5	10	213	119	M5	75	63	97	160	4	12.5	M4	40	7	80	104	3	18	100	115

Manufactured and tested in accordance with IEC 60034

FR.AG.010 REV. NO: 03 REV TARİHİ : 01.01.2021

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*MECALINE has right to change all the data without prior notice.