



Technical data

UCFC.210.N


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC210G2, FC210N

VISUAL (S)

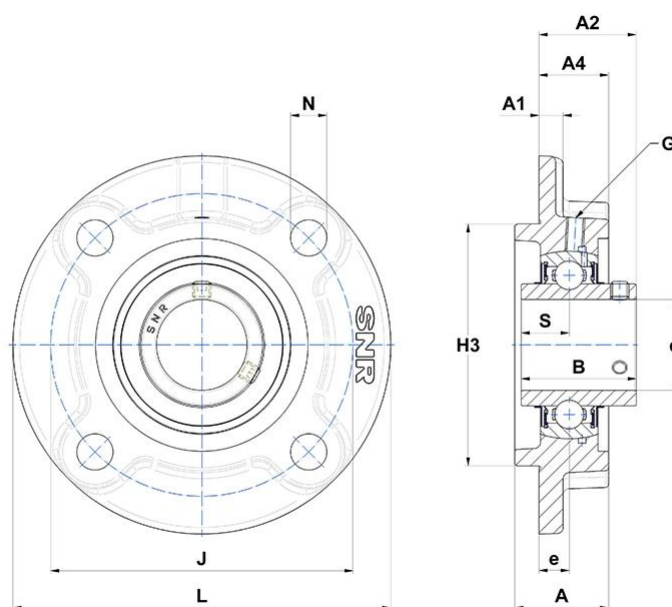

PRODUCT DIMENSIONS

A - Housing height	40 mm
A1 - Housing foot height / flange height	14 mm
A2 - Total height from mouting surface	42,6 mm
A4 - Housing height from mounting surface	28 mm
B - Width of Inner Ring	51,6 mm
d - Shaft diameter	50 mm

PRODUCT DIMENSIONS

e - Distance mounting surface to bearing center	10 mm
G - Grease fitting	M6x1
H3 - Centering dia	110 mm
J - Mounting holes distance	138 mm
L - Housing width / diameter	165 mm
N - Mounting hole dimension	16 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	19 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	35,1 kN
C0 - Static load rating	23,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	2,79 kg
Recommended tightening torque for set screw	22 N-m