
## 1-2. Accessories Electrode cartridge

(Common for IZS40, IZS41 and IZS42)



Electrode cartridge type/ Electrode material

Electrode dartinge type/ Electrode material				
Symbol	Electrode cartridge type	Electrode		
Cyllibol		material		
Т	High speed de-ionizing	Tungsten		
С	cartridge	Silicon		
J	Energy saving type de-ionizing	Tungsten		
K	cartridge	Silicon		




Tungsten (Cartridge color: White)



Silicon (Cartridge color: Gray)


## Power supply cable

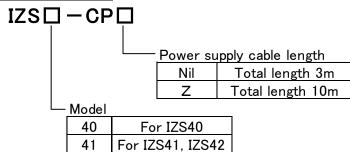



Made to Order							
How to Order	Contents/Specifications						
IZS□ — CP□-X13	Made to order power supply cable Available in						
Power supply cable length	a unit of 1 meter from 1 to 20m.						
機種 01 Total length 1m	a unit of 1 motor from 1 to 20m.						
40 For IZS40 02 Total length 2m	Note 1) CE not compliant for a cable of 10m						
41 For IZS41, IZS42	or longer.						
	Note 2) For 3m and 10m, use a standard						
	product.						
19 Total length 19m							
20 Total length 20m							

**Bracket** (Common for IZS40, IZS41 and IZS42)



Bracket type

Bracket type				
Е	End bracket			
М	Intermediate bracket			



Note) The following table lists a recommendation of the numbers of brackets required for intermediate support based on the bar length.

2 end brackets are necessary regardless of the bar length.

No of bracket

	THE OF ELECTION				
Bar length mm	End	Intermediate			
Dai leligui illili	bracket	bracket			
340 ~ 760	2 pcs.	None			
820 ~ 1,600		1 pcs.			
1,660 ~ 2,380		2 pcs.			
2,440 ~ 2,500		3 pcs.			

Intermediate bracket

