



Technical data

UCFA207


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC207G2, FA207

VISUAL (S)

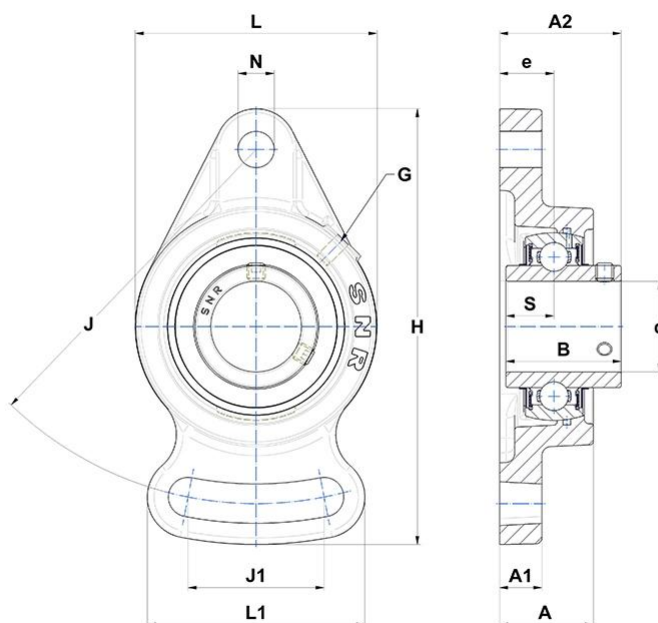

PRODUCT DIMENSIONS

A - Housing height	34 mm
A1 - Housing foot height / flange height	16 mm
A2 - Total height from mounting surface	44,4 mm
B - Width of Inner Ring	42,9 mm
d - Shaft diameter	35 mm
e - Distance mounting surface to bearing center	19 mm

PRODUCT DIMENSIONS

G - Grease fitting	M6x1
H - Housing length, width or diameter	161 mm
J - Mounting holes distance	130 mm
J1 - Center distance of slotted hole	66 mm
L - Housing width / diameter	90 mm
L1 - Housing width at slotted area	82 mm
N - Mounting hole dimension	15 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	17,5 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	25,7 kN
C0 - Static load rating	15,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,27 kg
Recommended tightening torque for set screw	11.5 N-m