




EGW10-E40-B

Thrust washer

Schaeffler ID:
0708489800000

Thrust washer, maintenance-free, material in accordance with ISO 3547-4, with bronze backing

Technical information

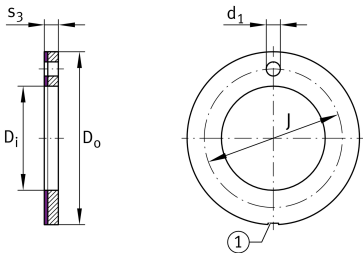

Main Dimensions & Performance Data

D _i	10 mm	Inner diameter
s ₃	1,5 mm	Wall thickness
C _a	33.000 N	Basic dynamic load rating, axial
C _{0a}	58.900 N	Basic static load rating, axial
≈m	2,64 g	Weight

Dimensions

t _a	1 mm	Mounting dimension
d _{6a}	20 mm	Mounting dimension d_6a
D _{i OT}	0,25 mm	Inner diameter, upper tolerance
D _{i UT}	0 mm	Inner diameter, lower tolerance
D _o	20 mm	Outer Diameter
D _{o OT}	0 mm	Outside diameter, upper tolerance
D _{o UT}	-0,25 mm	Outside diameter, lower tolerance
s _{3 OT}	0 mm	Wall thickness, upper tolerance
s _{3 UT}	-0,05 mm	Wall thickness, lower tolerance
J _{OT}	0,12 mm	Pitch circle, upper tolerance
J _{UT}	-0,12 mm	Pitch circle, lower tolerance
t _{a OT}	0,2 mm	Mounting dimension, upper tolerance
t _{a UT}	-0,2 mm	Mounting dimension, lower tolerance
d _{6a OT}	0,12 mm	Mounting dimension d_6a, upper tolerance
d _{6a UT}	-0,12 mm	Mounting dimension d_6a, lower tolerance

Temperature range

T _{min}	-200 °C	Operating temperature min.
T _{max}	280 °C	Operating temperature max.