



Technical data

UCFLE203


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC203G2, FLE204

VISUAL (S)

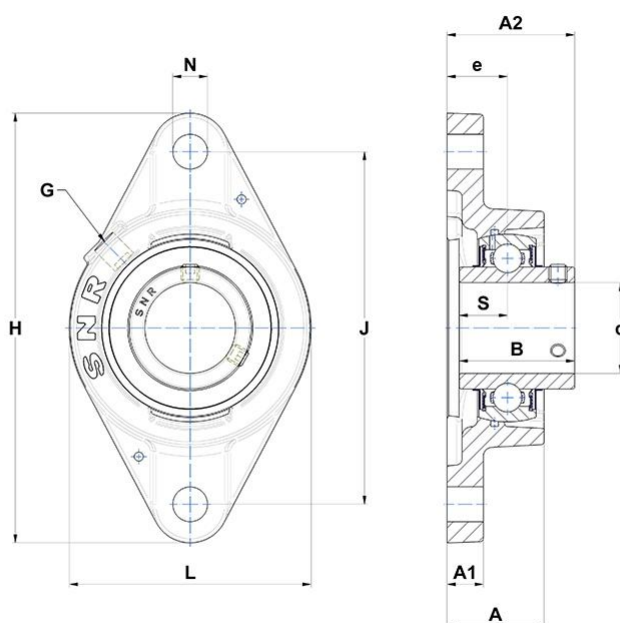

PRODUCT DIMENSIONS

A - Housing height	30,3 mm
A1 - Housing foot height / flange height	10 mm
A2 - Total height from mouting surface	37,3 mm
B - Width of Inner Ring	31 mm
d - Shaft diameter	17 mm
e - Distance mounting surface to bearing center	19 mm

PRODUCT DIMENSIONS

G - Grease fitting	R1/8"
H - Housing length, width or diameter	112 mm
J - Mounting holes distance	90 mm
L - Housing width / diameter	61 mm
N - Mounting hole dimension	11,5 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	12,7 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	12,8 kN
C0 - Static load rating	6,65 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	0,48 kg
Recommended tightening torque for set screw	5.5 N-m