

Mounting flange, Series LU3

- for cylinders with locking units
- Ø 1.26-3.94 inch



Ambient temperature min./max.	-4 ... 176 °F
Medium temperature min./max.	-4 ... 176 °F
Weight	See table below

Technical data


Part No.	Piston Ø	Weight
1827001504	1.26 inch	0.518 lbs
1827001505	1.57 inch	0.794 lbs
1827001506	1.97 inch	1.4 lbs
1827001508	2.48 inch	1.85 lbs
1827001433	3.15 inch	3.57 lbs
1827001434	3.94 inch	5 lbs

Technical information

Material	
Housing	Nodular graphite iron, galvanized

Dimensions

Dimensions

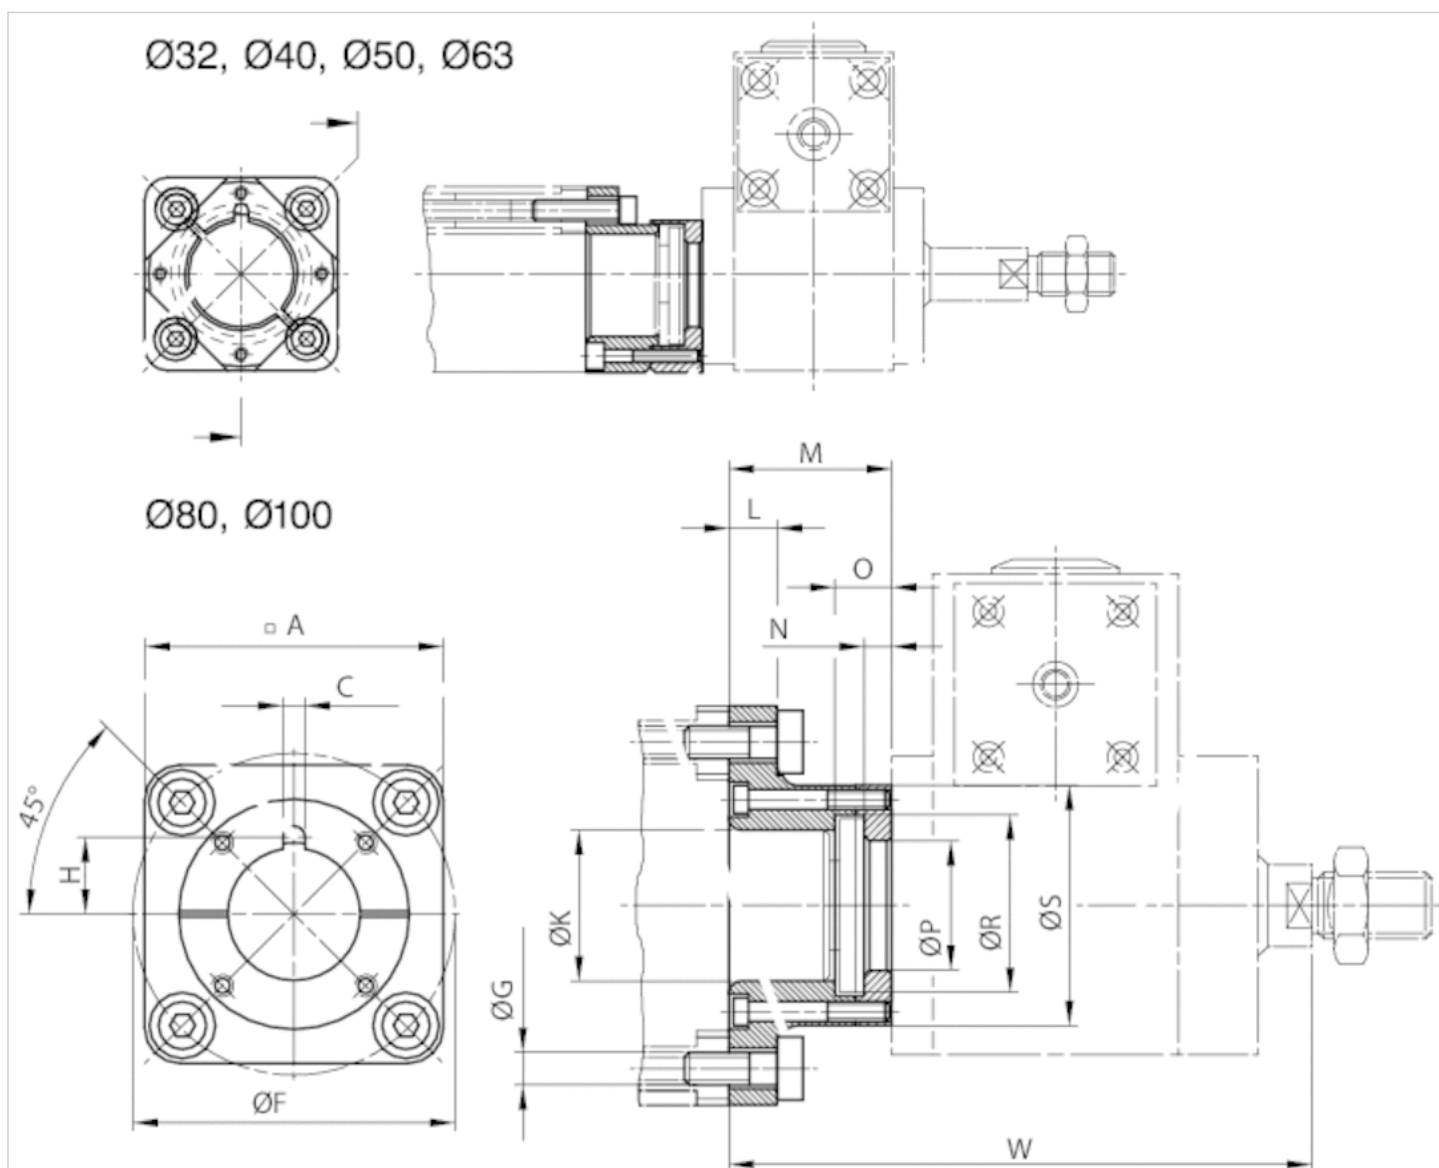

Screws included in scope of delivery
The locking unit can be rotated by 4x90°.

Dimensions

Part No.	A	C +0,1	Ø F ±0,2	G H13	H	Ø K H10	L	M	N -0,1	O	Ø P +0,2	Ø R +0,5
1827001504	50	3.6	46	6.6	13.2	30	7	27.2	3.9	8	24.2	33
1827001505	57	3.6	54	6.6	18.2	35	9.5	33.3	4.9	10	30.2	40
1827001506	68	3.6	66	8.4	18.2	40	11	38.3	4.9	10	30.2	40
1827001508	75	3.6	80	8.4	18.2	45	11	38.3	4.9	10	30.2	40
1827001433	95	6	102	10.5	24.5	45	15	52	7.9	16	40.2	55
1827001434	115	6	126	10.5	24.6	55	15	57	7.9	16	40.2	55

Ø S	W
46.5	105
55.5	111

Ø S	W
66	137
71	137
75	186
80	191