



Flange Style: JAF20 to JAF160

JAF20 to ø40

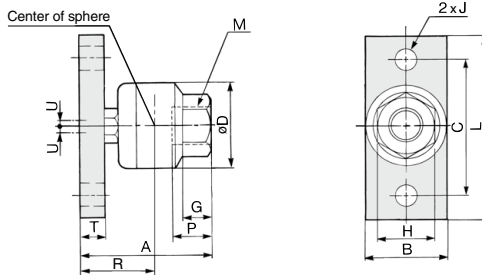

øJAF50 to ø160

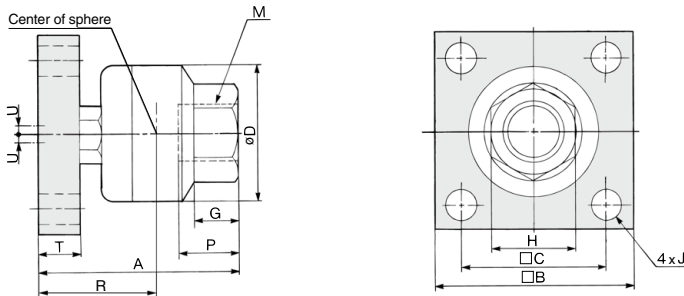

																		(mm)
Applicable bore size (mm)	Model	M		A	B	L	C	D	T	J	G	H	Center of sphere R	Maximum thread depth P	Allowable eccentricity U	Maximum operating tension and compression force (N)	Weight (kg)	
		Nominal size	Pitch															
Standard																		Pneumatic: Up to 1 MPa Hydraulic: Up to 3.5 MPa
20	JAF20-8-125	8	1.25	32.5	19	48	36	21	6	6.6	7	13	19	8	0.5	1100	0.08	
25, 32	JAF30-10-125	10	1.25	36	25	52	40	24	6	6.6	8	17	20.5	9	0.5	2500	0.12	
40	JAF40-14-150	14	1.5	49	32	70	52	31	9	9	11	22	27	13	0.75	4400	0.28	
50, 63	JAF63-18-150	18	1.5	61.5	65	—	45	41	12	9	13.5	27	34.5	15	1	11000	0.63	
80	JAF80-22-150	22	1.5	76.5	75	—	55	50	16	11	16	32	43.5	18	1.25	18000	1.15	
100	JAF100-26-150	26	1.5	94	90	—	65	59.5	19	11	20	41	52	24	2	28000	2.07	
125, 140	JAF140-30-150	30	1.5	131	125	—	82	79	24	18	22	46	73.5	38	2.5	36000	5.2	
160	JAF160-36-150	36	1.5	152	150	—	100	96	29	22	24	55	86	42	3	55000	9	

Semi-standard Pneumatic: Up to 1 MPa Hydraulic: Up to 3.5 MPa

20	JAF20-8-100	8	1	32.5	19	48	36	21	6	6.6	7	13	19	8	0.5	1100	0.08
25	JAF25-10-150	10	1.5	36	25	52	40	24	6	6.6	8	17	20.5	9	0.5	2500	0.12
32	JAF32-10-100	10	1	36	25	52	40	24	6	6.6	8	17	20.5	9	0.5	2500	0.12
32, 40	JAF40-12-125	12	1.25	49	32	70	52	31	9	9	11	22	27	13	0.75	4400	0.28
40	JAF40-12-150	12	1.5	49	32	70	52	31	9	9	11	22	27	13	0.75	4400	0.28
32, 40	JAF40-12-175	12	1.75	49	32	70	52	31	9	9	11	22	27	13	0.75	4400	0.28
50	JAF50-16-150	16	1.5	61.5	65	—	45	41	12	9	13.5	27	34.5	15	1	11000	0.63
50, 63	JAF63-16-200	16	2	61.5	65	—	45	41	12	9	13.5	27	34.5	15	1	11000	0.63
80	JAF80-20-250	20	2.5	76.5	75	—	55	50	16	11	16	32	43.5	18	1.25	18000	1.15
100	JAF100-24-300	24	3	94	90	—	65	59.5	19	11	20	41	52	24	2	28000	2.07
100	JAF100-27-150	27	1.5	94	90	—	65	59.5	19	11	20	41	52	24	2	28000	2.07
125	JAF125-27-200	27	2	106	100	—	72	66	21	18	20	41	60	24	2	28000	2.8
160	JAF160-33-200	33	2	152	150	—	100	96	29	22	24	55	86	42	3	55000	9

J□

D-□

-X□

Technical data