



BH6FC1000 **Foldable crane 1T**






PRODUCT DETAILS







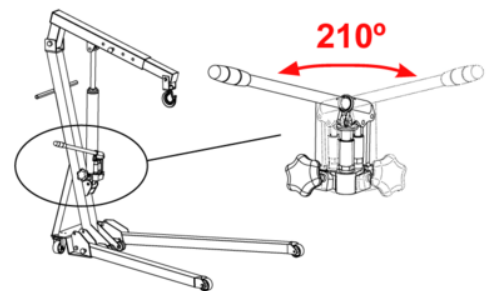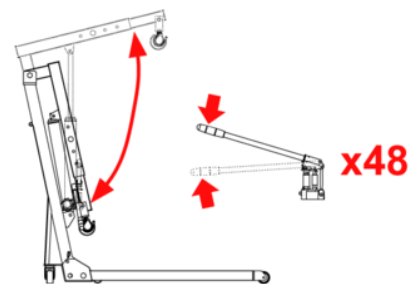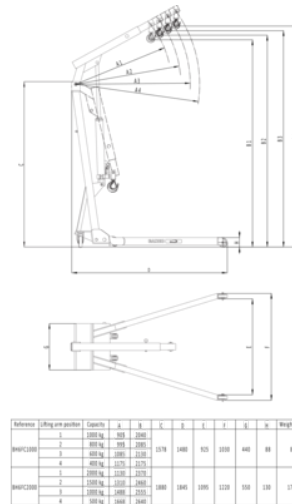



- Used to lift and support a wide range of heavy vehicle parts, such as engines, transmissions, etc.
- 4 fixed positions of the lifting arm: 1,000, 750, 500 and 250 kg
- High flexibility and broad application area:
- Minimum entry height: 88 mm
- Maximum hook height: 2175 mm
- Foldable legs enable compact storage of the crane when not in use
- Dual piston system decreases the number of necessary strokes by 50%
- Steel and nylon wheels ensure both excellent durability and silent handling
- Swivelling PU pump lever for easy and comfortable pumping from any direction
- Increased safety due to the "dead man" safety mechanism, overload valve, swivel safety hook, etc.
- CE certified by Official Independent Technical Inspection Association

Follow the Fish!





PRODUCT ATTRIBUTES

| Product |  |  |  |  |  |  |  |  |  |  |
|------------------|---|---|---|---|---|---|---|---|---|---|
| BH6FC1000 | 1000 kg | 750 kg | 500 kg | 250 kg | 88 mm | +/- 45 | 1480 mm | 1030 mm | 2175 mm | 85 kg |

Follow the Fish!



Contact: info@bahco.com / www.bahco.com