




Technical datasheet

NJ2308

Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, pressed steel cage.

Visual(s)

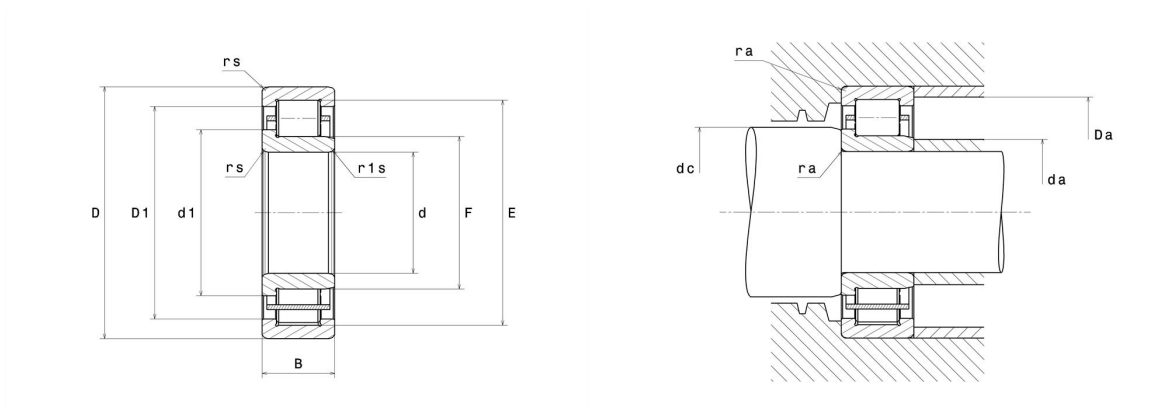

Product definition

d	40 mm
D	90 mm
B	33 mm
E	77.5 mm
F	53.5 mm
d1	58.4 mm
rs min	1.5 mm
r1s min	1.5 mm
Radial clearance class	CN
Mass (without HJ ring)	1 kg
Brand	NTN

Product performance

Dynamic load, C	82.5 kN
Static load, C₀	88 kN
Fatigue limit load, C_u	10.7 kN
N_{lim} (oil)	8,200 rpm
N_{lim} (grease)	7,000 rpm
Min operating temperature, T_{min}	-40 °C
Max operating temperature, T_{max}	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.28 Hz
Characteristic outer ring frequency, BPF₀	4.9 Hz
Characteristic inner ring frequency, BPFI	7.1 Hz

Abutment dimensions

da min	48 mm
da max	51 mm
dc min	60 mm
Da max	82 mm
ra max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = F_r$$

Equivalent static radial load

$$P_0 = F_r$$