

Accessories, MS series

Connecting plates MS9


FESTO

Connecting plate-SET

MS9-AG.../MS9-AQ...

(order code: AG.../AQ...)

- Adapter for pneumatic connection

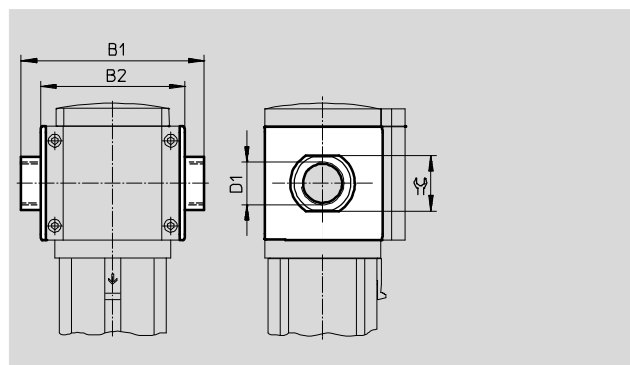

Operating and environmental conditions

Temperature of medium [°C]	-10 ... +60
Corrosion resistance class CRC ¹⁾	2

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Materials

Connecting plate	Die-cast aluminium
Hollow bolt	Die-cast aluminium
Seals	NBR
Note on materials	RoHS-compliant
	Free of copper and PTFE

Dimensions and ordering data

Size	B1	B2	D1	≡	Weight [g]	Part No.	Type
G thread							
MS9	132	112	G1½	30	300	552954	MS9-AGD
	132	112	G¾	36	300	552955	MS9-AGE
	142	112	G1	41	300	552956	MS9-AGF
	162	112	G1¼	50	400	552957	MS9-AGG
	176	112	G1½	55	400	552958	MS9-AGH
NPT thread							
MS9	132	112	NPT½-14	30	300	552959	MS9-AQR
	132	112	NPT¾-14	36	300	552960	MS9-AQS
	142	112	NPT1-11½	41	300	552961	MS9-AQT
	162	112	NPT1¼-11½	50	400	552962	MS9-AQU
	176	112	NPT1½-11½	55	400	552963	MS9-AQV

• Note: This product conforms to ISO 1179-1 and to ISO 228-1