




Technical datasheet

N208

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

Visual(s)

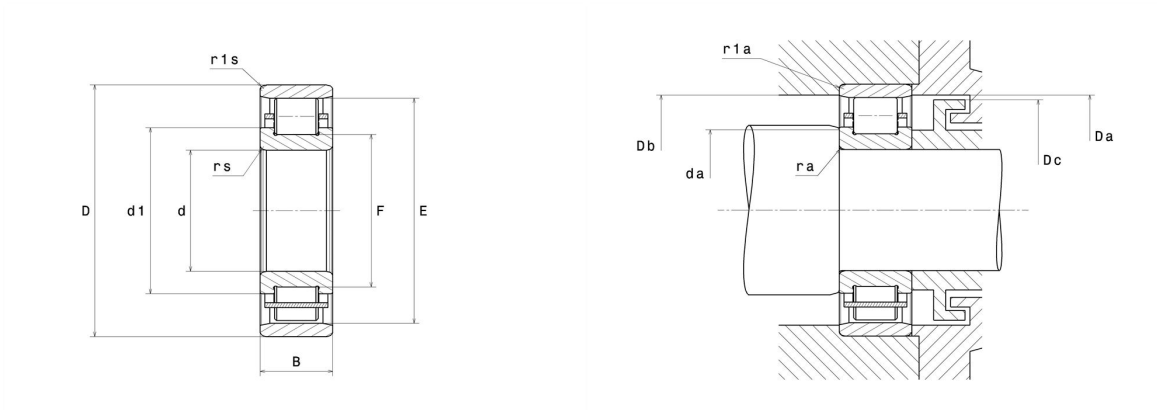

Product definition

d	40 mm
D	80 mm
B	18 mm
E	70 mm
F	50 mm
d1	54.2 mm
rs min	1.1 mm
r1s min	1.1 mm
Radial clearance class	CN
Mass (without HJ ring)	0.37 kg
Brand	NTN

Product performance

Dynamic load, C	43.5 kN
Static load, C0	43 kN
Fatigue limit load, Cu	5.2 kN
Nlim (oil)	11,000 rpm
Nlim (grease)	9,400 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.83 Hz
Characteristic outer ring frequency, BPF0	5.42 Hz
Characteristic inner ring frequency, BPFI	7.58 Hz

Abutment dimensions

da min	46.5 mm
Da max	73.5 mm
Db min	71 mm
Dc max	68 mm
ra max	1 mm
r1a max	1 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$