




Technical datasheet

N406

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

Visual(s)

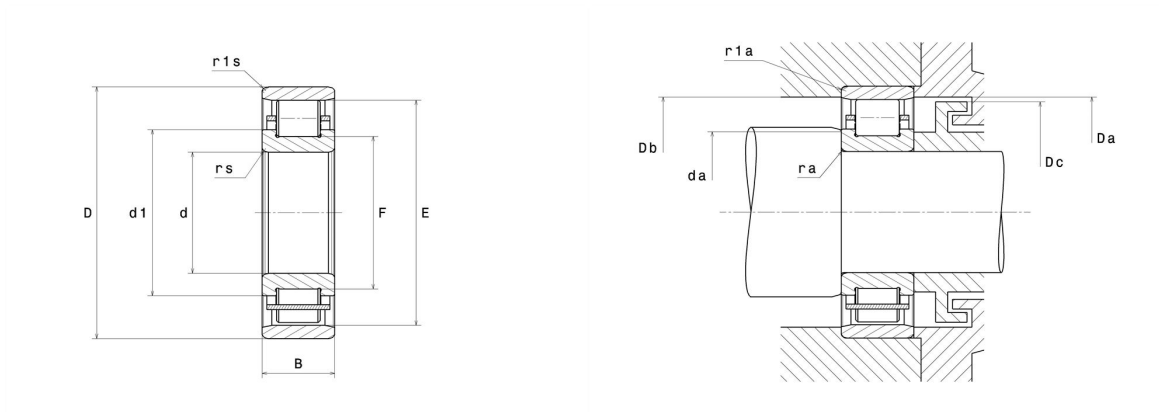

Product definition

d	30 mm
D	90 mm
B	23 mm
E	73 mm
F	45 mm
d1	50.5 mm
rs min	1.5 mm
r1s min	1.5 mm
Radial clearance class	CN
Mass (without HJ ring)	0.74 kg
Brand	NTN

Product performance

Dynamic load, C	62.5 kN
Static load, C0	55 kN
Fatigue limit load, Cu	6.7 kN
Nlim (oil)	8,500 rpm
Nlim (grease)	7,300 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	3.98 Hz
Characteristic outer ring frequency, BPF0	3.43 Hz
Characteristic inner ring frequency, BPFI	5.57 Hz

Abutment dimensions

da min	38 mm
Da max	82 mm
Db min	74 mm
Dc max	71 mm
ra max	1.5 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$