


ROV Blanking plug for tube ends

EO 24°cone end

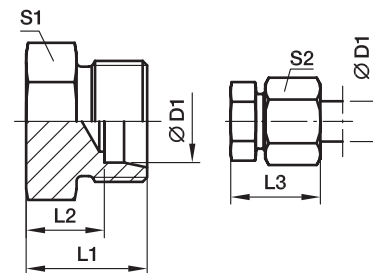

Series	D1 	L1	L2	L3	S1	S2	Weight g/1 piece	Order code*	PN (bar) ¹⁾		
									CF	A3C	71
L ³⁾	06	14	7.0	22	12	14	8	ROV06L	315	315	315
	08	15	8.0	23	14	17	13	ROV08L	315	315	315
	10	16	9.0	24	17	19	17	ROV10L	315	315	315
	12	17	10.0	25	19	22	24	ROV12L	315	315	315
	15	18	11.0	26	24	27	41	ROV15L	315	315	315
	18	19	11.5	28	27	32	56	ROV18L	315	315	315
	22	21	13.5	30	32	36	84	ROV22L	160	160	160
	28	22	14.5	31	41	41	138	ROV28L	160	160	160
	35	25	14.5	36	46	50	203	ROV35L	160	160	160
	42	27	16.0	39	55	60	318	ROV42L	160	160	160
S ⁴⁾	06	18	11.0	26	14	17	17	ROV06S	630	630	630
	08	20	13.0	28	17	19	28	ROV08S	630	630	630
	10	20	12.5	29	19	22	33	ROV10S	630	630	630
	12	22	14.5	31	22	24	50	ROV12S	630	630	630
	14	24	16.0	34	24	27	62	ROV14S	630	630	630
	16	24	15.5	34	27	30	75	ROV16S	400	400	400
	20	28	17.5	39	32	36	125	ROV20S	400	400	400
	25	32	20.0	44	41	46	229	ROV25S	400	400	400
	30	34	20.5	47	46	50	310	ROV30S	400	400	400
	38	39	23.0	54	55	60	508	ROV38S	315	315	315

¹⁾ Pressure shown = item deliverable

³⁾ L = light series; ⁴⁾ S = heavy series

 $\frac{PN \text{ (bar)}}{10} = PN \text{ (MPa)}$

Delivery without nut and ring. Information on ordering complete fittings see page I7.

*Please add the **suffixes** below according to the material/surface required.

Order code suffixes		
Material	Suffix surface and material	Example
Steel, zinc plated, chrome ⁶ -free	CFX	ROV16SCFX
Steel, zinc yellow plated	A3CX	ROV16SA3CX
Stainless Steel	71X	ROV16S71X