

Speed Controller with One-touch Fitting Elbow Type/Universal Type

Series AS

Minimizes installation time and cost

Reduces the mounting height and enables compact machinery design. Effective area is larger than the former model.

Tube swivels 360°

Universal type permits 360° piping swivel.

ø2 size added to applicable tubing sizes

- **Metric size** (Release button: White color)
ø2, ø3.2, ø4, ø6, ø8, ø10, ø12
- **Inch size** (Release button: Orange color)
ø1/8", ø5/32", ø3/16", ø1/4", ø5/16", ø3/8", ø1/2"

Maximum operating pressure 1 MPa max.

Applicable tubing materials

Nylon, soft nylon, and polyurethane tubing are applicable.

Retainer prevents accidental loss of needle.






























































Option

Hexagonal lock nut, Nickel plated option

Number of needle rotations has been increased (8 to 10 turns)

The increased number of needle rotations (8 to 10 turns) permits easy control at low speeds.

Model

Elbow type	Universal type	Port size	Applicable tubing O.D.														Applicable cylinder bore size (mm)		
			Metric size							Inch size									
			2	3.2	4	6	8	10	12	1/8"	5/32"	3/16"	1/4"	5/16"	3/8"	1/2"			
AS12□1F-M3	AS13□1F-M3	M3 x 0.5																2.5, 4, 6	
AS12□1F-M5	AS13□1F-M5	M5 x 0.8																6, 10, 16, 20 ⁽¹⁾	
AS12□1F-U10/32	AS13□1F-U10/32	10-32 UNF																6, 10, 16, 20	
AS22□1F-01	AS23□1F-01	R 1/8							⁽²⁾									20, 25, 32	
AS22□1F-02	AS23□1F-02	R 1/4																20, 25, 32, 40	
AS32□1F-02	AS33□1F-02	R 1/4																40, 50, 63	
AS32□1F-03	AS33□1F-03	R 3/8																40, 50, 63	
AS42□1F-04	AS43□1F-04	R 1/2																	63, 80, 100

Note 1) AS12□1F-M5-02 applicable cylinder bore sizes are 2.5, 4, 6.

Note 2) Elbow type only

Note 3) Meter-out and meter-in types can be visually differentiated by the lock nut. The lock nut on the meter-out type is electroless nickel plated, while the meter-in type is black zinc chromate plated.

Note 4) ● Marking is electroless nickel plated, provided as standard. (N specifications)

Specifications

Fluid	Air
Proof pressure	1.5 MPa (1.05 MPa ⁽¹⁾)
Max. operating pressure	1 MPa (0.7 MPa ⁽¹⁾)
Mini. operating pressure	0.1 MPa
Ambient and fluid temperature	-5 to 60°C (No freezing)
Number of needle rotations	10 turns (8 turns ⁽²⁾)
Applicable tubing material ⁽³⁾	Nylon, Soft nylon, Polyurethane ⁽⁴⁾
Option	With seal, Hexagon lock nut ⁽⁵⁾ , Electroless nickel plated ⁽⁶⁾

Note 1) In case of AS12□1F-M3-02, AS12□1F-M5-02

Note 2) In case of AS12□1F-M5 and AS12□1F-U10/32 types.

In case of AS13□1F-M5 and AS13□1F-U10/32
AS12□1F-M5-02: 10 turns.

Note 3) Use caution regarding the max. operating pressure when soft nylon or polyurethane tubing is used. (Refer to pages 371 and 372 for details.)

Note 4) In case of AS12□1F-M3-02 and AS12□1F-M5-02, polyurethane only.

Note 5) M3, M5, 10-32UNF type ports are not available with seals.

Note 6) Brass parts are all electroless nickel plated.

Flow Rate and Effective Area

Model	Metric size	AS12□1F-M3 AS13□1F-M3 AS12□1F-M5-02	AS12□1F-M5 AS13□1F-M5	AS22□1F-01 AS23□1F-01	AS22□1F-02 AS23□1F-02	AS32□1F AS33□1F	AS42□1F AS43□1F
		ø2, ø3.2, ø4	ø3.2, ø4, ø6	ø3.2, ø4, ø6, ø8, ø10	ø4, ø6, ø8, ø10	ø6, ø8, ø10, ø12	ø10, ø12
Tubing O.D.	Metric size	ø2, ø3.2, ø4	ø3.2, ø4, ø6	ø3.2, ø4, ø6, ø8, ø10	ø4, ø6, ø8, ø10	ø6, ø8, ø10, ø12	ø10, ø12
	Inch size	ø1/8", ø5/32"	ø1/8", ø3/16", ø1/4", ø5/32"	ø1/8", ø3/16", ø1/4", ø5/16"	ø5/32", ø3/16", ø1/4", ø5/16", ø3/8"	ø1/4", ø5/16", ø3/8"	ø3/8", ø1/2"
Controlled flow (Free flow)	Flow rate ℓ/min (ANR)	20	100	180	260 390	460 660 790	920 1580
	Effective area (mm ²)	0.3	1.5	2.7	3.5 4 6	7 10 12 14	24 26

Note 1) Flow rate values are measured at 0.5 MPa and 20°C.

Note 2) U10/32 has the same specification as M5.


Elbow type
Applicable tubing O.D. ø2



Universal type



JIS Symbol



Flow Direction Symbols on Body

	Meter-out type	Meter-in type
Symbol		
JIS Symbol		

Caution

Be sure to read before handling.
Refer to front matters 58 and 59 for Safety Instructions and pages 412 to 414 for Flow Control Equipment Precautions.



Made to Order
(Refer to page 422 for details.)

Speed Controller with One-touch Fittings Stainless Steel Series In-line Type

Series AS-FG



Model

Model	Applicable tubing O.D.												Applicable cylinder bore size (mm)	
	Metric size						Inch size							
	3.2	4	6	8	10	12	1/8"	5/32"	3/16"	1/4"	5/16"	3/8"		1/2"
AS1001FG	●	●	●				●	●	●	●				6, 10, 16, 20
AS2001FG		●	●					●	●	●				20, 25, 32
AS2051FG			●	●					●	●	●			20, 25, 32, 40
AS3001FG			●	●	●	●				●	●	●		40, 50, 63
AS4001FG					●	●						●	●	63, 80, 100

Specifications

Fluid	Air
Proof pressure	1.5 MPa
Max. operating pressure	1 MPa
Min. operating pressure	0.1 MPa
Ambient and fluid temperature	-5 to 60°C (No freezing)
Number of needle rotations	10 turns (8 turns ⁽¹⁾)
Applicable tubing material ⁽²⁾	Nylon, Soft nylon, Polyurethane

Note 1) In the case of AS1001FG type

Note 2) Use caution regarding the max. operating pressure when soft nylon or polyurethane tubing is used.
(Refer to pages 371 and 372 for details.)

Flow Rate and Effective Area

Flow Direction Symbols on Body



Model		AS1001FG	AS2001FG		AS2051FG		AS3001FG			AS4001FG	
Tubing O.D.	Metric size	ø3.2 ø4 ø6	ø4	ø6	ø6	ø8	ø6	ø8	ø10 ø12	ø10	ø12
	Inch size	ø1/8" ø5/32" ø3/16"	ø5/32"	ø3/16" ø1/4"	ø3/16"	ø1/4" ø5/16"	ø1/4"	ø5/16"	ø3/8"	ø3/8"	ø1/2"
	Flow rate (l/min (ANR))	100	130	230	290	460	420	660	920	1050	1390
(Free flow) Effective area (mm ²)		1.5	2	3.5	4.5	7	6.5	10	14	16	21

Note) Flow rate values are measured at 0.5 MPa and 20°C.



Made to Order
(Refer to page 479 for details.)

How to Order

AS 200 1 F G - 06 -

Body size

100	M5 standard
200	1/8 standard
205	1/4 standard
300	3/8 standard
400	1/2 standard

With One-touch fittings

Stainless steel specifications (Stainless steel 303)

Made to Order
(Refer to the below for details.)

Applicable tubing O.D.

Metric size		Inch size	
23	ø3.2 *	01	ø1/8"
04	ø4	03	ø5/32"
06	ø6	05	ø3/16"
08	ø8	07	ø1/4"
10	ø10	09	ø5/16"
12	ø12	11	ø3/8"
		13	ø1/2"

* Use ø1/8" tube.

Made to Order



Lubricant: Vaseline

X12

Ex.) AS1001FG-04-X12

Grease-free (Seal: Fluorine Coating) +
Throttle Valve (Without Check Valve)

X21

Ex.) AS1001FG-04-X21

(Note) Not particle-free


Throttle Valve (Without Check Valve)

X214


Ex.) AS1001FG-04-X214

Needle Valve/Flow Characteristics


AS1001FG

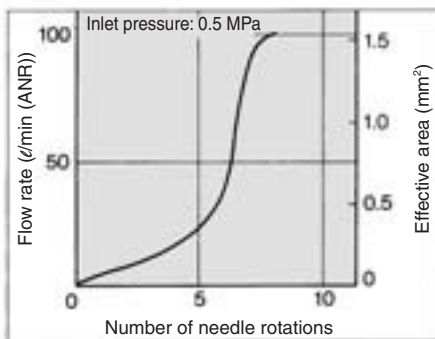


AS2001FG

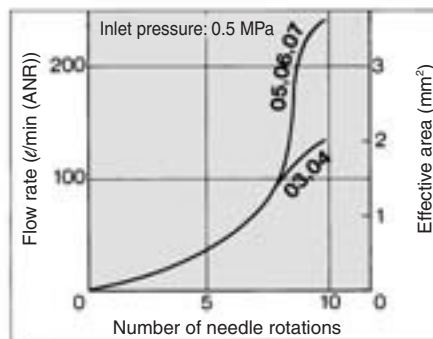


AS2051FG

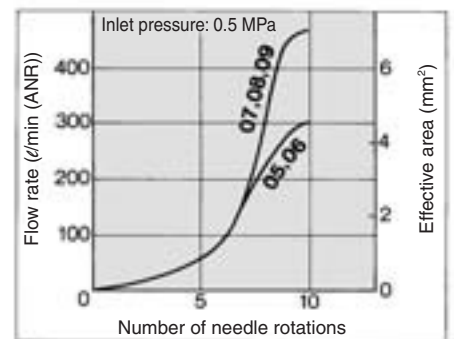

AS3001FG

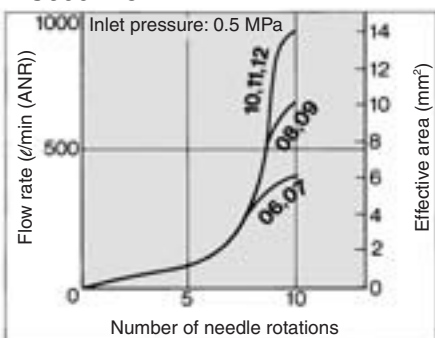

AS4001FG

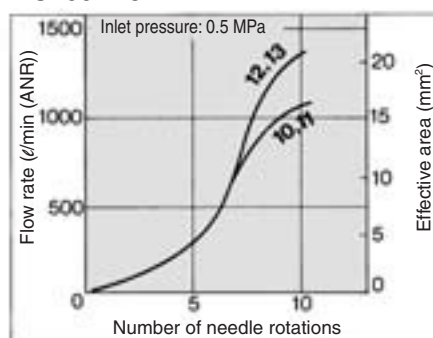

AS

ASP

ASN

AQ

ASV

AK

VCHC

ASS

ASR
ASQ

KE

TMH