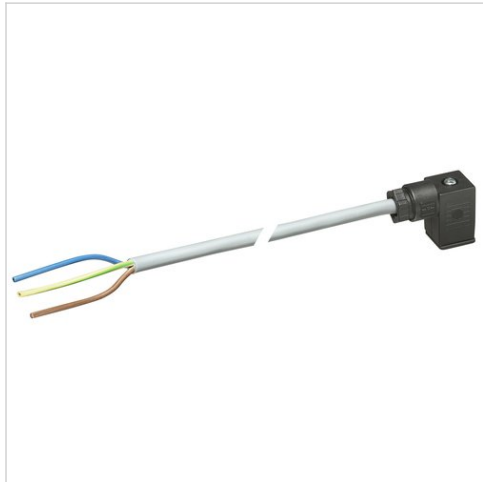






Valve plug connector, series CON-VP

- Socket form C 2+E angled 90°
- open cable ends 3-pin
- with cable
- unshielded



Ambient temperature min./max.	-20 ... 80 °C
Operational voltage	See table below
Protection class	IP67
Wire cross-section	0,75 mm ²
Mounting screw tightening torque	0,4 Nm
Weight	See table below

Technical data

Part No.		Operational voltage	Max. current	Protective circuit	Contact assignment
1834484212		230 V AC/DC	6 A	-	2+E
1834484213		230 V AC/DC	6 A	-	2+E
1834484214		230 V AC/DC	6 A	-	2+E
1834484215		230 V AC/DC	6 A	-	2+E
1834484204		24 V AC/DC	6 A	Z-diode	2+E
1834484205		24 V AC/DC	6 A	Z-diode	2+E
1834484206		24 V AC/DC	6 A	Z-diode	2+E
1834484207		24 V AC/DC	6 A	Z-diode	2+E
1834484208		230 V AC/DC	6 A	Varistor	2+E
1834484209		230 V AC/DC	6 A	Varistor	2+E
1834484210		230 V AC/DC	6 A	Varistor	2+E
1834484211		230 V AC/DC	6 A	Varistor	2+E
1834484236		24 V AC/DC	6 A	Z-diode	2+E

Part No.	LED status display	Number of wires	Cable-Ø	Cable length	Weight	Fig.	
1834484212	-	3	5,9 mm	3 m	0,183 kg	Fig. 1	-
1834484213	-	3	5,9 mm	3 m	0,183 kg	Fig. 2	-
1834484214	-	3	5,9 mm	5 m	0,308 kg	Fig. 1	-
1834484215	-	3	5,9 mm	5 m	0,308 kg	Fig. 2	-
1834484204	Yellow	3	5,9 mm	3 m	0,185 kg	Fig. 1	1)
1834484205	Yellow	3	5,9 mm	3 m	0,185 kg	Fig. 2	1)
1834484206	Yellow	3	5,9 mm	5 m	0,292 kg	Fig. 1	1)
1834484207	Yellow	3	5,9 mm	5 m	0,298 kg	Fig. 2	1)
1834484208	Yellow	3	5,9 mm	3 m	0,171 kg	Fig. 1	1)
1834484209	Yellow	3	5,9 mm	3 m	0,194 kg	Fig. 2	1)

Part No.	LED status display	Number of wires	Cable-Ø	Cable length	Weight	Fig.	
1834484210	Yellow	3	5,9 mm	5 m	0,297 kg	Fig. 1	1)
1834484211	Yellow	3	5,9 mm	5 m	0,285 kg	Fig. 2	1)
1834484236	Yellow	3	5,9 mm	10 m	0,571 kg	Fig. 2	1)

1) Scope of delivery incl. flat gasket

Technical information

The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Seals	caoutchouc/butadiene caoutchouc
Cable sheath	Polyvinyl chloride

Dimensions

Fig. 1, Dimensions in mm, 0° female insert

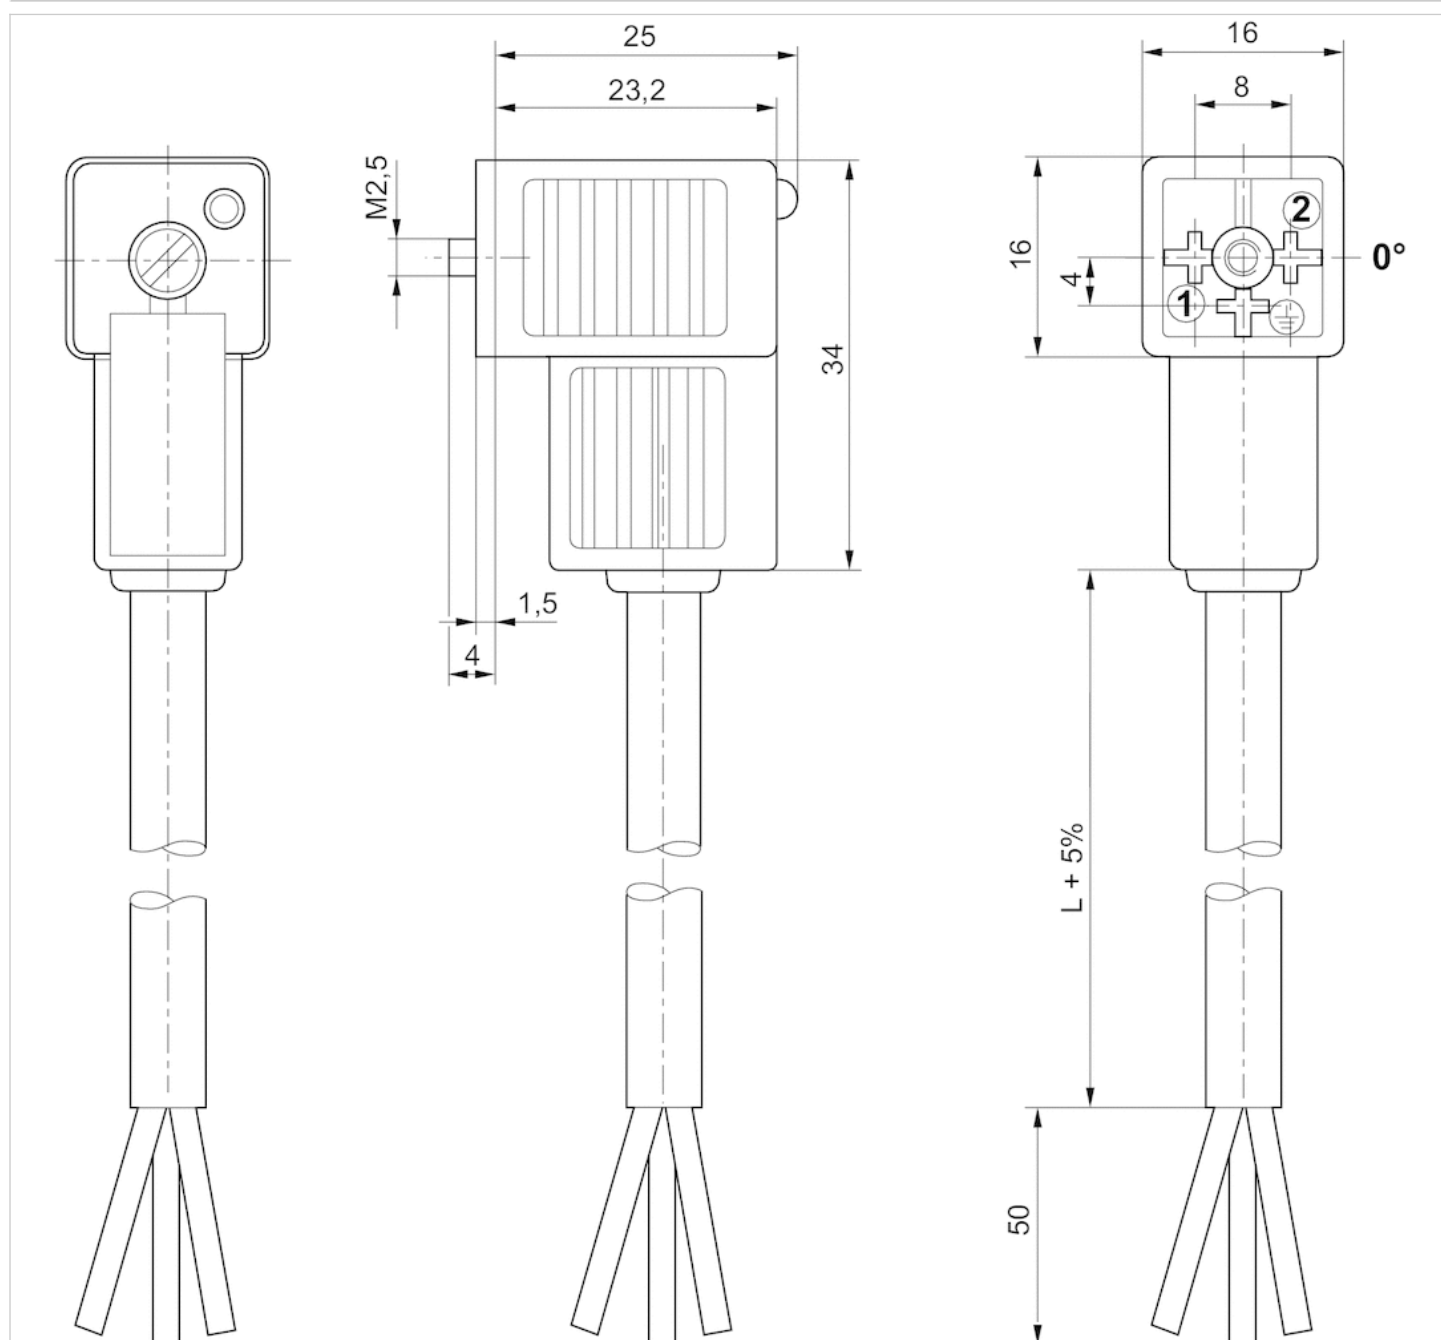


Fig. 2, Dimensions in mm, 180° female insert

