




Technical datasheet

N408

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

Visual(s)

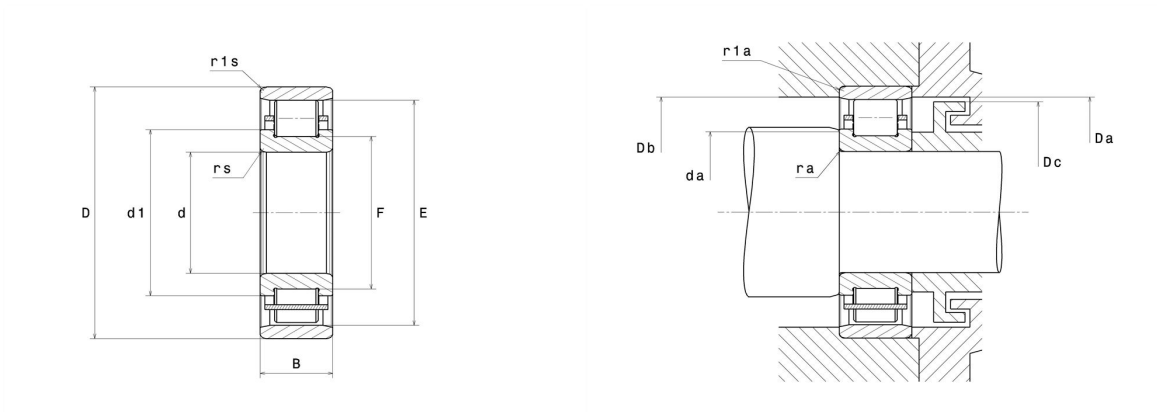

Product definition

d	40 mm
D	110 mm
B	27 mm
E	92 mm
F	58 mm
d1	64.8 mm
rs min	2 mm
r1s min	2 mm
Radial clearance class	CN
Mass (without HJ ring)	1.26 kg
Brand	NTN

Product performance

Dynamic load, C	95.5 kN
Static load, C0	89 kN
Fatigue limit load, Cu	10.9 kN
Nlim (oil)	6,700 rpm
Nlim (grease)	5,700 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	49 mm
Da max	101 mm
Db min	93 mm
Dc max	90 mm
ra max	2 mm
r1a max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = F_r$$

Equivalent static radial load

$$P_0 = F_r$$