

Clevis mounting MP2, Series CM1

- for rear eye MP9 with rubber bushing
- Suitable piston Ø 25, 32, 40, 50, 63, 80, 100 mm
- for series 167



Technical data


Part No.	Piston Ø	Swivel bearing Ø	Housing material
3682902590	25 mm	10 mm	Aluminum (anodized)
3672903000	32 mm	10 mm	Aluminum (forged and anodized)
3672904000	40 mm	12 mm	Aluminum (forged and anodized)
3672905000	50 mm	12 mm	Aluminum (forged and anodized)
3672906000	63 mm	16 mm	Aluminum (forged and anodized)
3672908000	80 mm	16 mm	Aluminum (forged and anodized)
3672910000	100 mm	20 mm	Aluminum (forged and anodized)

Scope of delivery: clevis mounting incl. pivot pins and mounting screws

Technical information

Material	
Material	see table
Screws	Stainless steel
Mounting bolts	Stainless steel

Dimensions

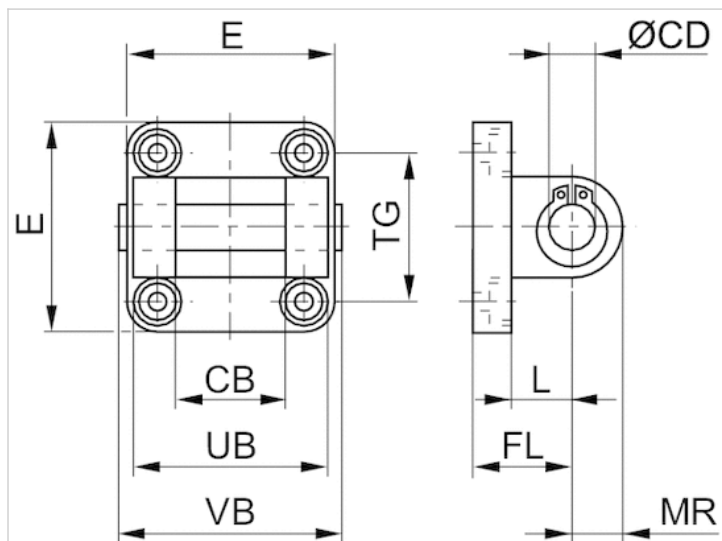

Dimensions

Part No.	CB H14	Ø CD H9	E max.	FL	L min.	MR	UB h14	VB
3682902590	18	10	40	20	14	9	36	42,5
3672903000	26	10	47,5	22	12	11	45	64
3672904000	28	12	53,5	25	15	13	52	71
3672905000	32	12	64	27	15	13	60	79
3672906000	40	16	74	32	18	17	70	93
3672908000	50	16	95	36	20	17	90	113
3672910000	60	20	113,5	41	25	21	110	133

TG *contains elongated hole

26/27*

32

40*

46

59*

73

90*